

S
627.83
N7gdm
2003

GARTSIDE DAM

STATE DOCUMENTS COLLECTIO.

JUL 25 2003

MONTANA STATE LIBRARY
1515 E. 6th AVE.
HELENA, MONTANA 59620

MANUAL FOR OPERATION AND MAINTENANCE

Montana Department of Fish, Wildlife, And Parks
Field Services Division
Design and Construction Bureau
1420 East Sixth Avenue
Helena, MT 59620

**Initial Publication December 4, 1997
Revised July 2003**

MONTANA STATE LIBRARY



3 0864 1002 1333 2

GARTSIDE DAM

MANUAL FOR OPERATION AND MAINTENANCE

Montana Department of Fish, Wildlife, And Parks
Field Services Division
Design and Construction Bureau
1420 East Sixth Avenue
Helena, MT 59620

Initial Publication December 4, 1997
Revised July 2003



Digitized by the Internet Archive
in 2015

<https://archive.org/details/gartsidedammanua2003mont>

TABLE OF CONTENTS

	<u>Page</u>
PROJECT DESCRIPTION	1
Overview	1
Embankment	1
Outlet Works	2
Spillway	3
Drains	3
Location Map (Figure 1)	5
Vicinity Map (Figure 2)	6
Dam General Layout Map (Figure 3)	7
Monitoring Wells Location Map (Figure 4)	8
STATISTICAL INFORMATION	9
OPERATING PROCEDURES	13
Dam Operator	13
Method and Schedule of Operation	14
Gate Operation	14
Spillway	15
Safe Drawdown	15
Storage Determination	15
Inflow And Outflow Monitoring	15
Weather Monitoring	15
Interaction With Other Dams	16
Emergency	16
INSPECTION AND MONITORING	17
Structural Features Inspection	17
Riprap Inspection	18
Drains	18
Seepage	19
Monitoring Wells	20
Seepage Monitoring	21
Embankment Monitoring Points	21
MAINTENANCE	23
Routine Maintenance	23
Annual Maintenance	24
Record Keeping	24
REFERENCES	27

TABLE OF CONTENTS (continued)

	<u>Page</u>
APPENDICES.....	29
A. RATING CURVES AND TABLES.....	A1
TABLE 1. SLOPE/ELEVATION/STORAGE TABLE	A2
TABLE 2. ACTIVE STORAGE TABLE	A4
TABLE 3. SPILLWAY RATING CURVE	A5
B. INSPECTION CHECKLIST	B1
C. DISTRIBUTION LIST	C1
D. PROJECT DRAWINGS	D1

PROJECT DESCRIPTION

OVERVIEW

Gartside Dam is located on Crane Creek in Richland County. The project is approximately ten miles southwest of Sidney, Montana and about one mile northwest (upstream) of the town of Crane, Montana (see Figures 1 and 2). Figure 3 provides a general layout of the dam, spillway and outlet works.

The dam is owned by the Montana Department of Fish, Wildlife, and Parks (DFWP) and is managed by the Parks Division of the DFWP. The DFWP Makoshika State Park Office manages and operates the dam. The DFWP is responsible for repairs and maintenance of the dam. The DNRC State Water Projects Bureau (SWPB) inspects the dam annually and provides engineering assistance as needed.

Water in the reservoir is primarily used for recreation and fisheries water supply.

EMBANKMENT

The curved-axis earth-filled dam is 31 feet high and 1,350 feet long with a crest width of 28 feet. The dam has a 10 foot wide berm across the downstream toe to increase the strength and stability of the embankment.

The dam is believed to originally have been a beaver dam that was covered with soil by a local rancher in about 1900 to provide a more adequate water supply for cattle. The dam was enlarged in the 1930's to a height of 6 or 7 feet. The dam was raised further in 1955 and again in 1962 to its current height of 31 feet.

In 1982 a large depression formed around the drop inlet structure causing damage to both the embankment and the drop inlet structure. The dam was breached by DNRC in 1985 to alleviate dam safety concerns. A channel was excavated through the embankment and the outlet works was moved.

In 1990, the dam embankment was reconstructed. The repair included adding a 10 feet wide berm across the downstream toe of the of the dam, decreasing the upstream slope of the embankment, and adding cobble slope protection.

OUTLET WORKS

The outlet works, located in the left abutment of the dam, was replaced as part of the 1990 rehabilitation. Prior to 1990, the outlet works consisted of a corrugated metal pipe that was in very poor condition. Since the rehabilitation, there have been few problems. The only significant problem occurred in 1995 when the gate stem separated from the outlet gate. This resulted in the reservoir being drained. Once the gate and stem were repaired, stop nuts were placed on the control stem to prevent the gate from being closed too tight or opened too much.

The outlet works consist of an intake structure, an inclined slide gate, a 30-inch diameter reinforced concrete pipe (RCP) conduit, and an outlet structure. The intake structure is a rectangular concrete structure with a trash rack on top. There is a 30-inch diameter steel transition section between the intake structure and the RCP conduit. The RCP conduit is 201 feet long with a flared concrete wall outlet stilling basin at the end.

The 16-inch square inclined slide gate covers the steel intake pipe opening. The control for the gate is located on the upstream shoulder of the dam in a concrete vault. The gate is connected to the gate control structure by a 1-1/2-inch diameter

stainless steel stem which is encased in a galvanized steel pipe filled with hydraulic oil. The gate control structure consists of a gate lift pedestal with a horizontal wheel attached to the upper end of the stem. Operation of the sluice gate is conducted manually by turning the wheel to open or close the gate.

A 3-inch diameter galvanized vent pipe extends from near the gate control structure into the inlet structure to provide air to the gate. The vent pipe and gate stem are placed in a shallow trench in the dam embankment.

SPILLWAY

The spillway is located in the right abutment of the dam. During the 1990 rehabilitation, the spillway was enlarged and lined with soil-cement.

The spillway consists of a curved sand-gravel-grass lined approach channel, an uncontrolled soil-cement broad crested weir structure approximately 144-feet wide, and a soil-cement chute approximately 180 feet long which narrows to 100 feet. At the end of the soil-cement chute there is a concrete cutoff wall. A concrete revetment mattress is anchored in lean concrete to protect the end of the spillway chute from erosion.

DRAINS

During the 1990 rehabilitation, a blanket drain was constructed along the downstream toe of the dam. The drain is located under the toe berm and consists of two feet of gravel wrapped in filter fabric. The filter fabric is covered with larger course gravel and is approximately 10 feet wide. The drawings for the dam show that the gravel is surrounded by a geotextile on the top, upstream side and the bottom, with the downstream side being open.

Also in 1990, a drainage system was constructed under the spillway. It consists of a 3-inch diameter PVC perforated collection pipe located just downstream from the crest that connects into a 4-inch diameter perforated PVC pipe. The 4-inch pipe runs down the center of the spillway and exits through the cut-off wall at the downstream end of the spillway into the spillway exit channel. The pipes are located in a gravel filled trench.

In addition, there are several 2-inch diameter weep holes which were drilled into the edge of the spillway floor at a 40-foot spacing interval. These drains were designed to relieve uplift pressures on the soil-cement lining.

In 1998, a drain was installed along the left side of the outlet structure to help control seepage water that was flowing over the outlet sidewalls.

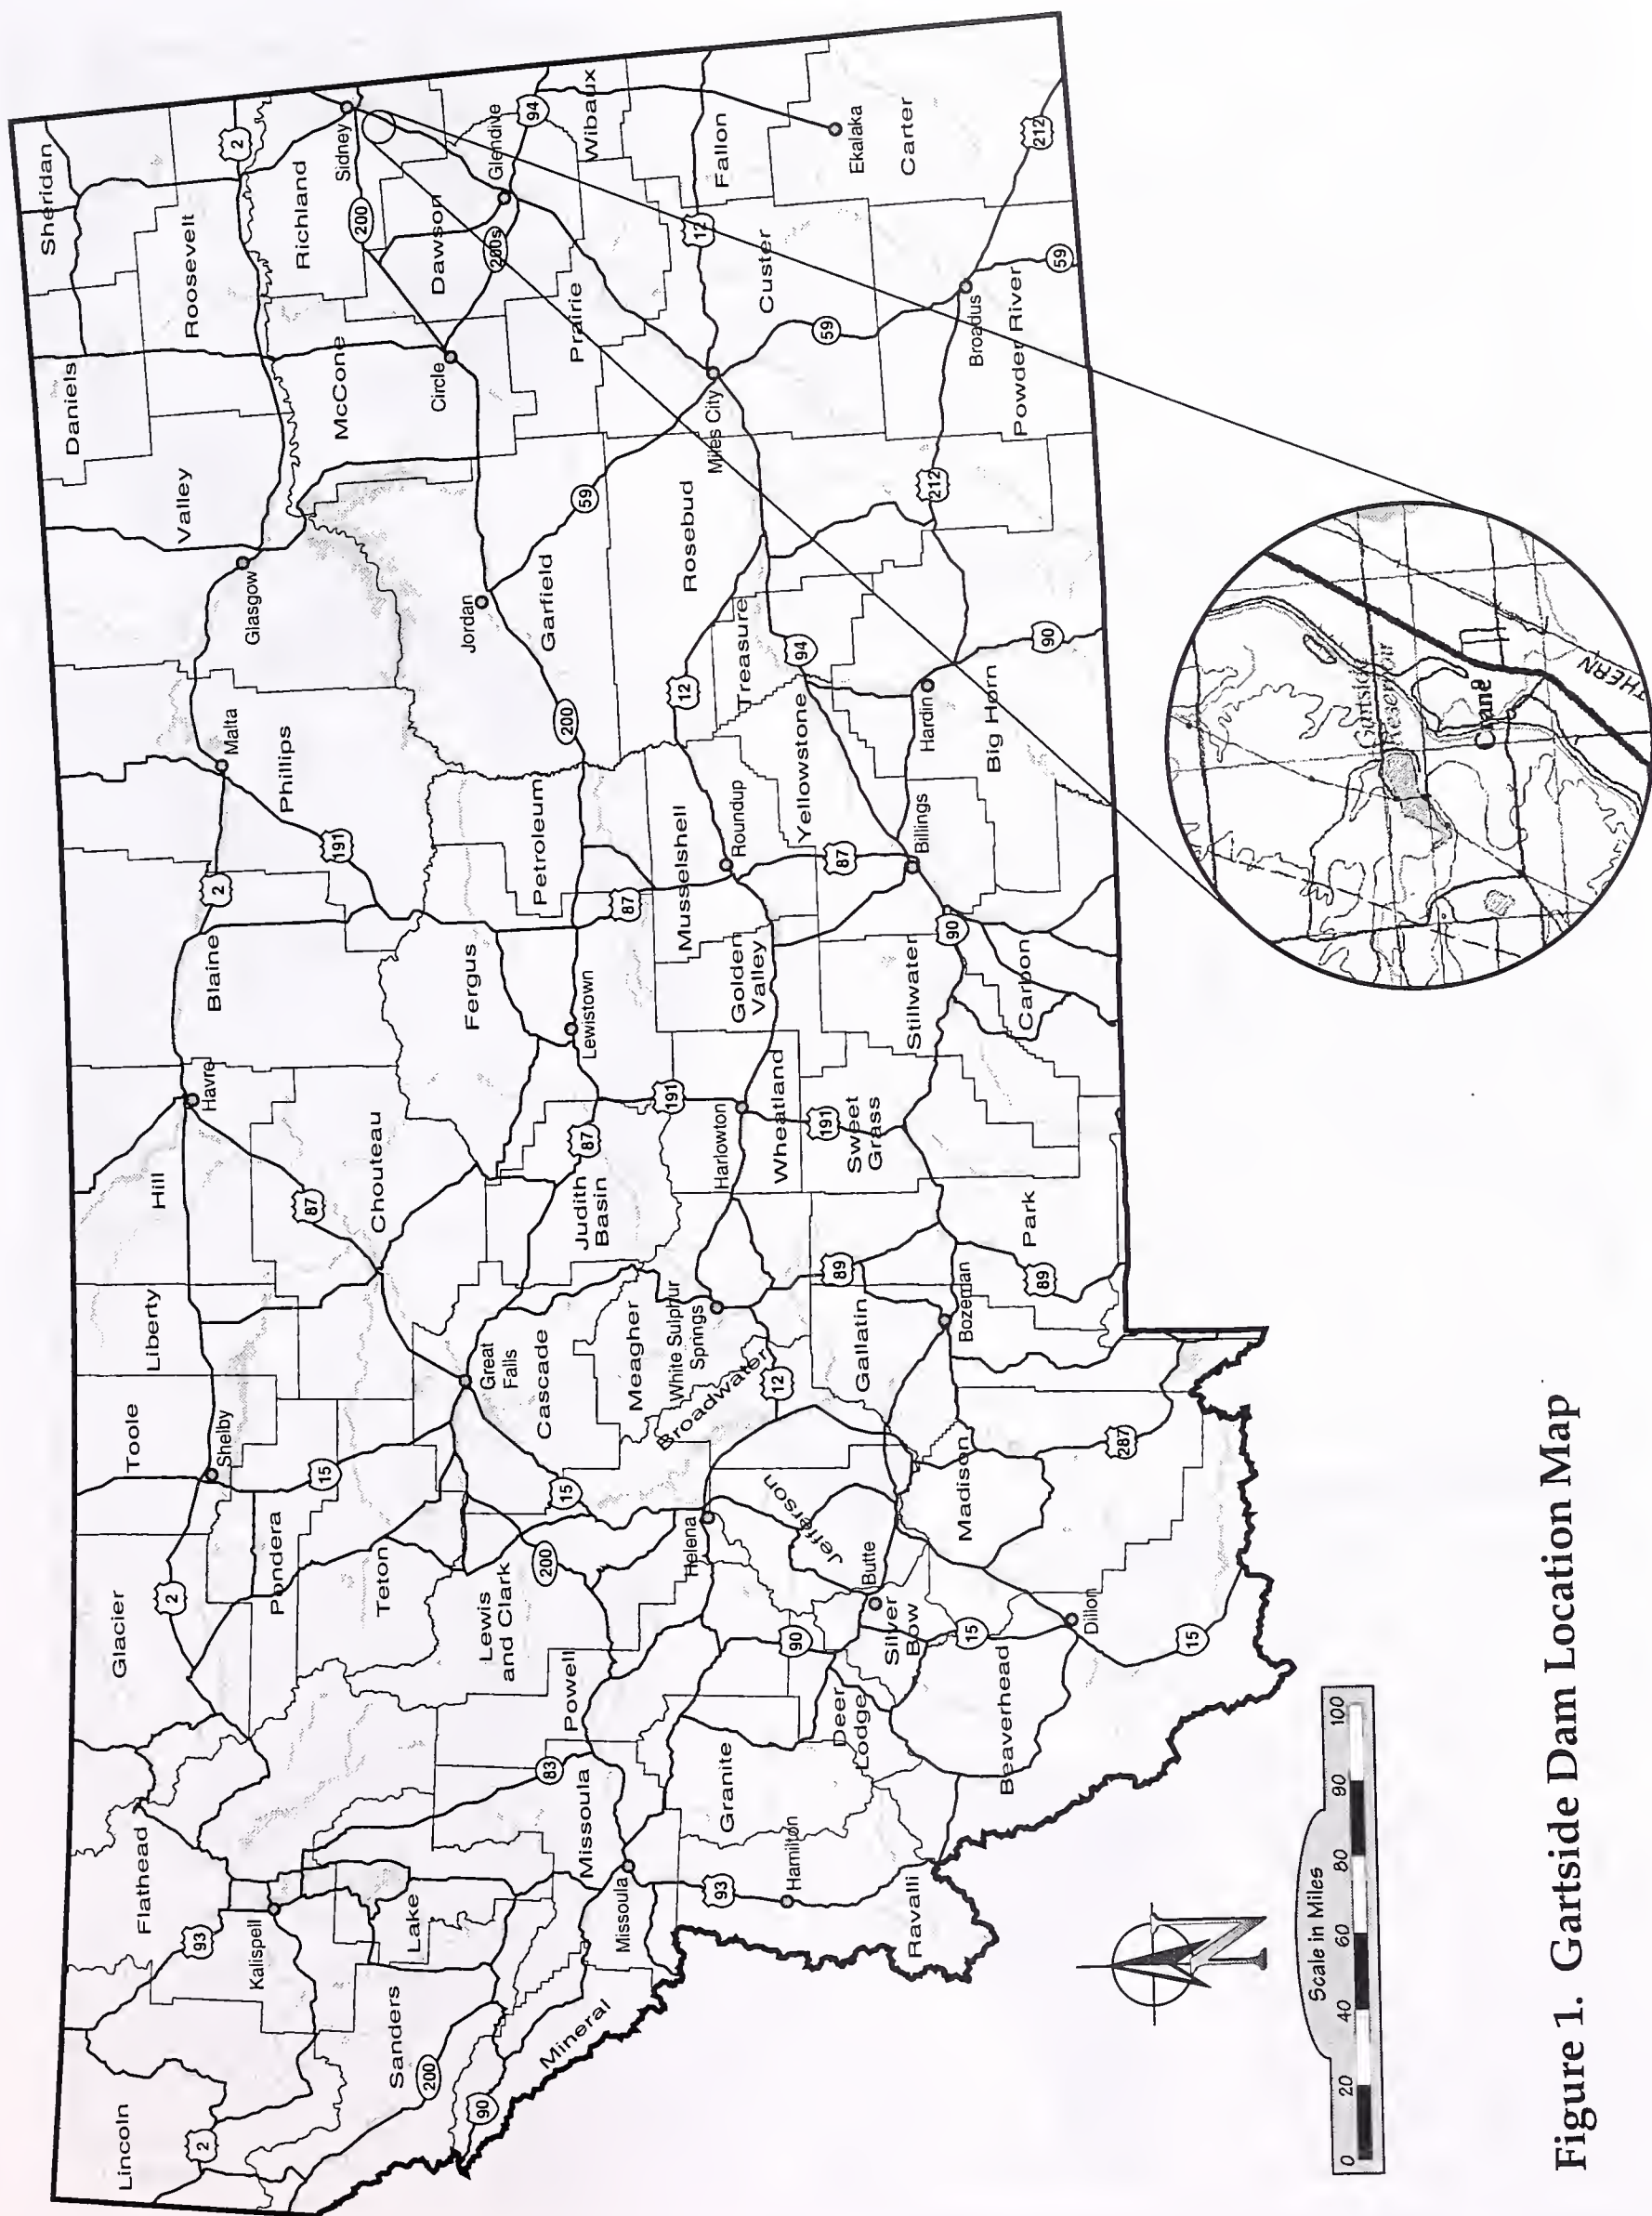


Figure 1. Gartside Dam Location Map

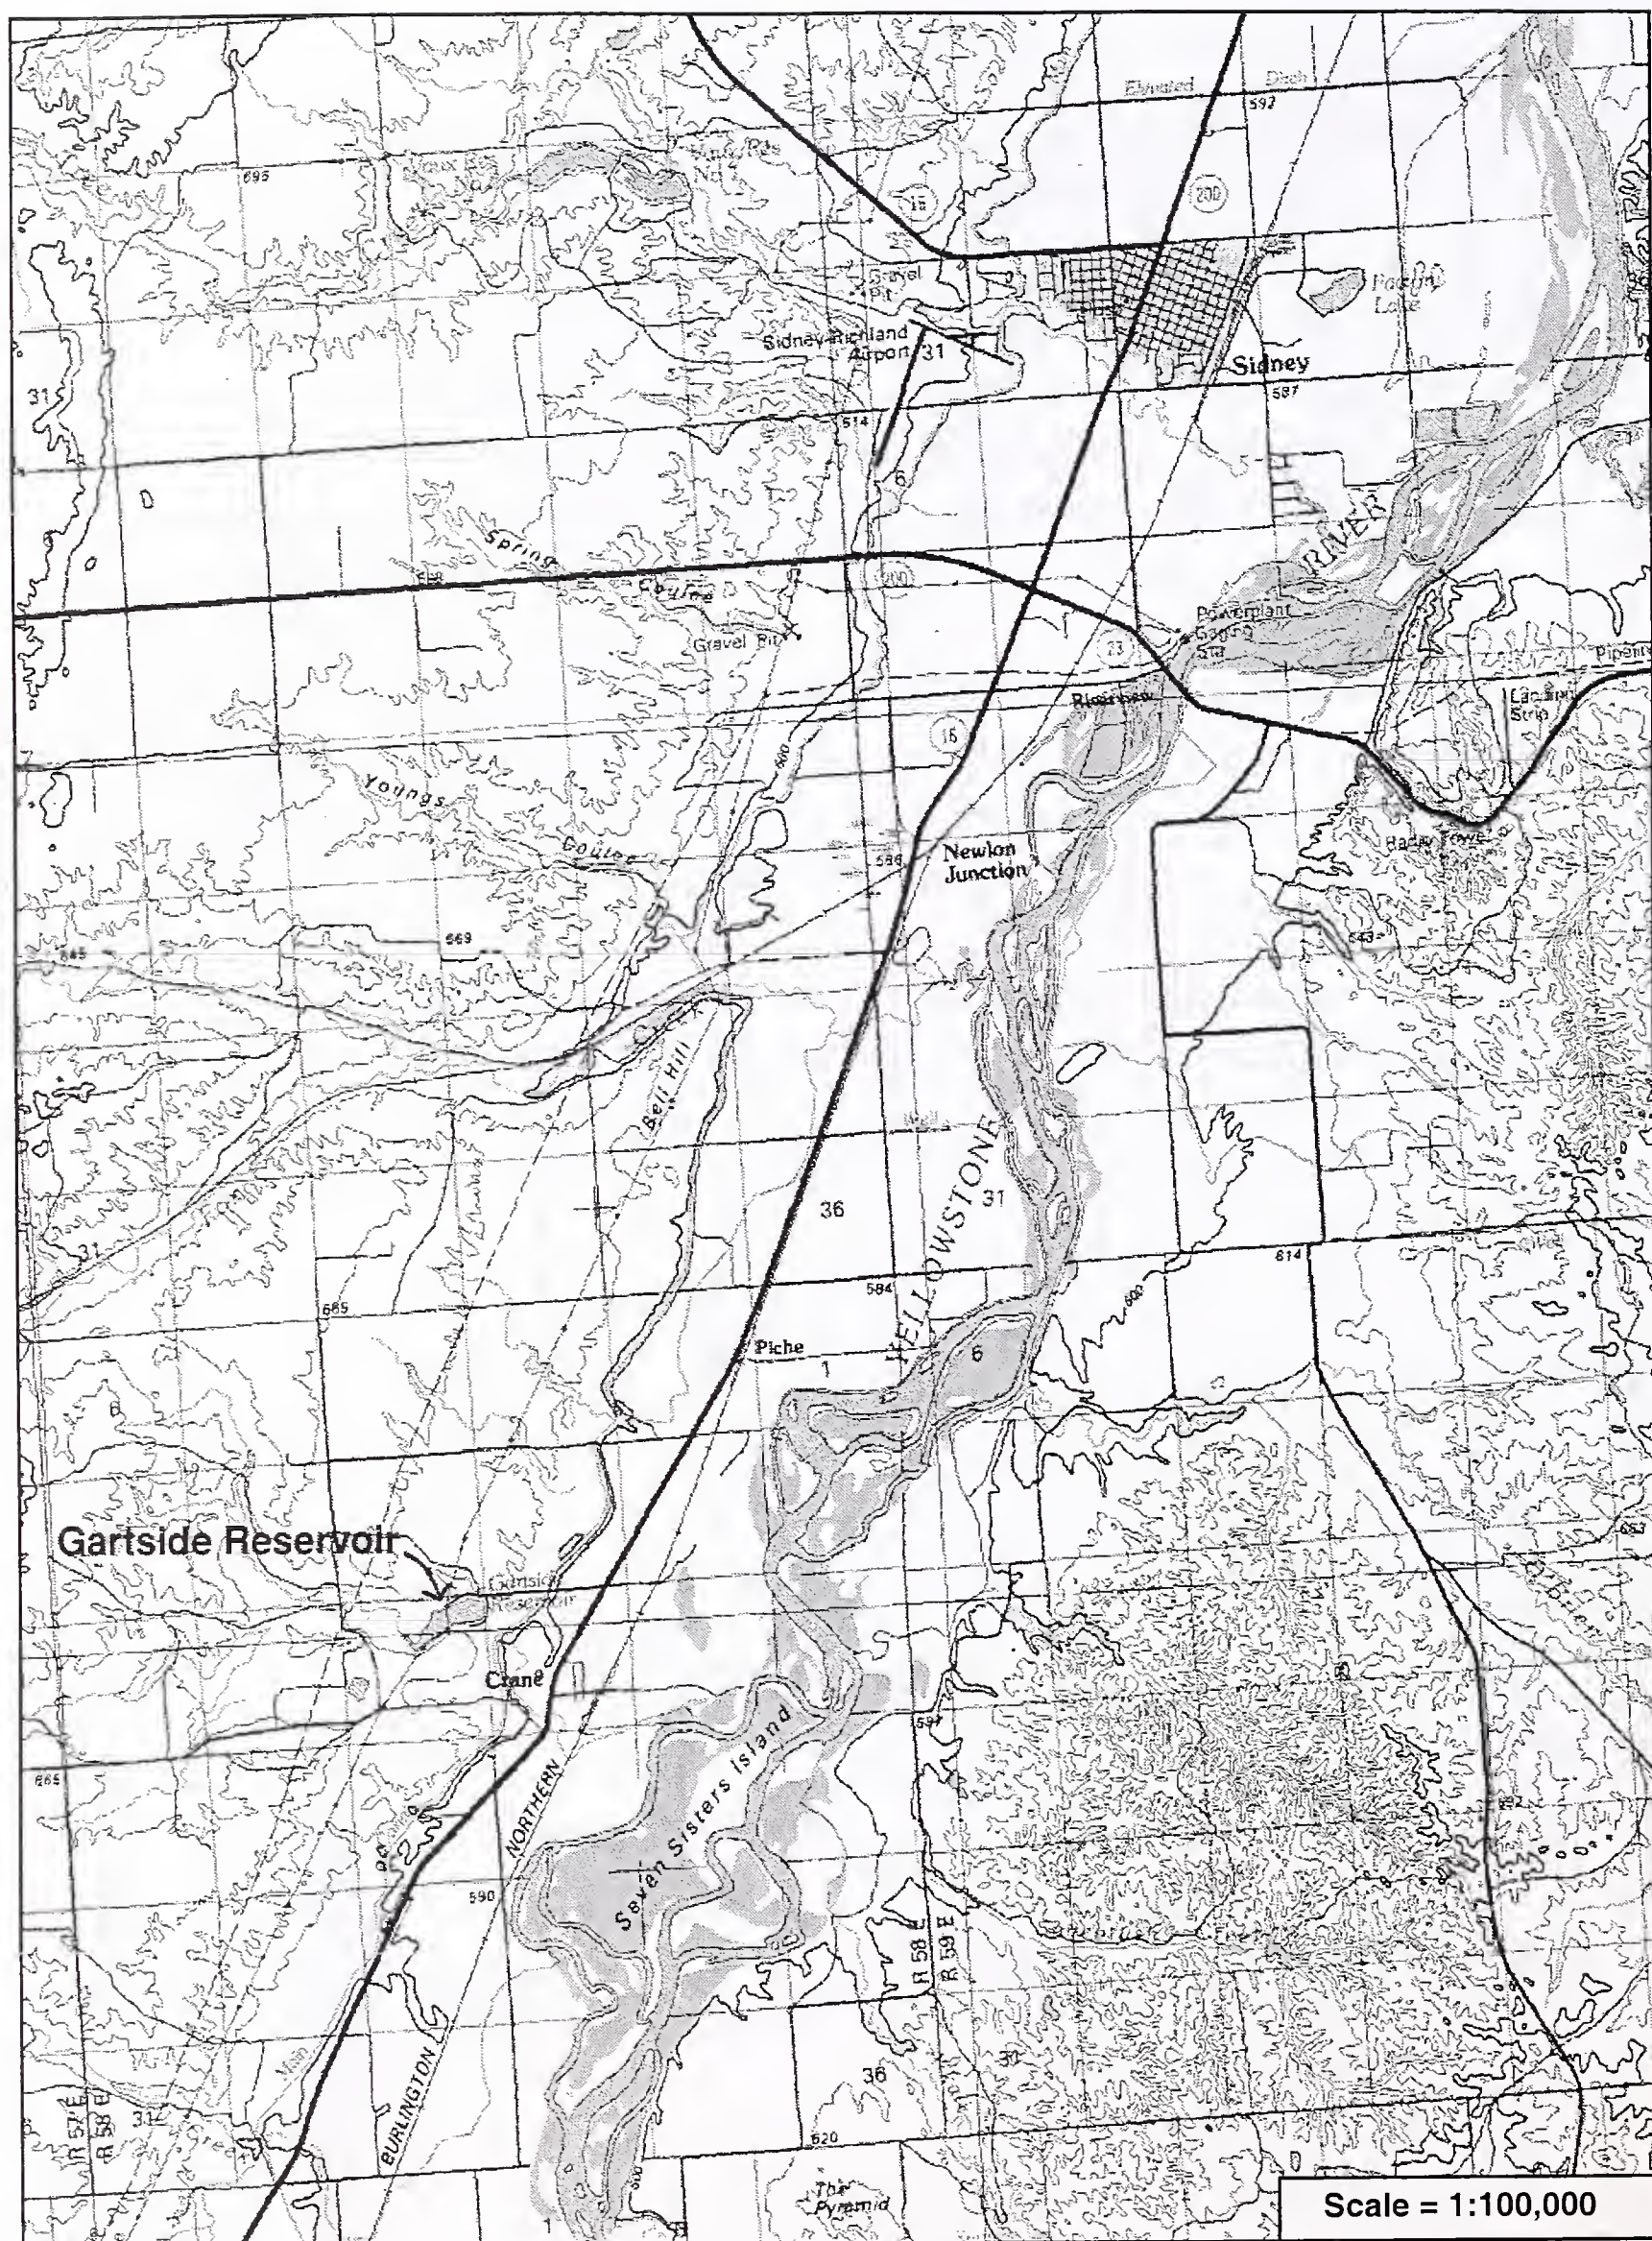


Figure 2. Gartside Dam Vicinity Map

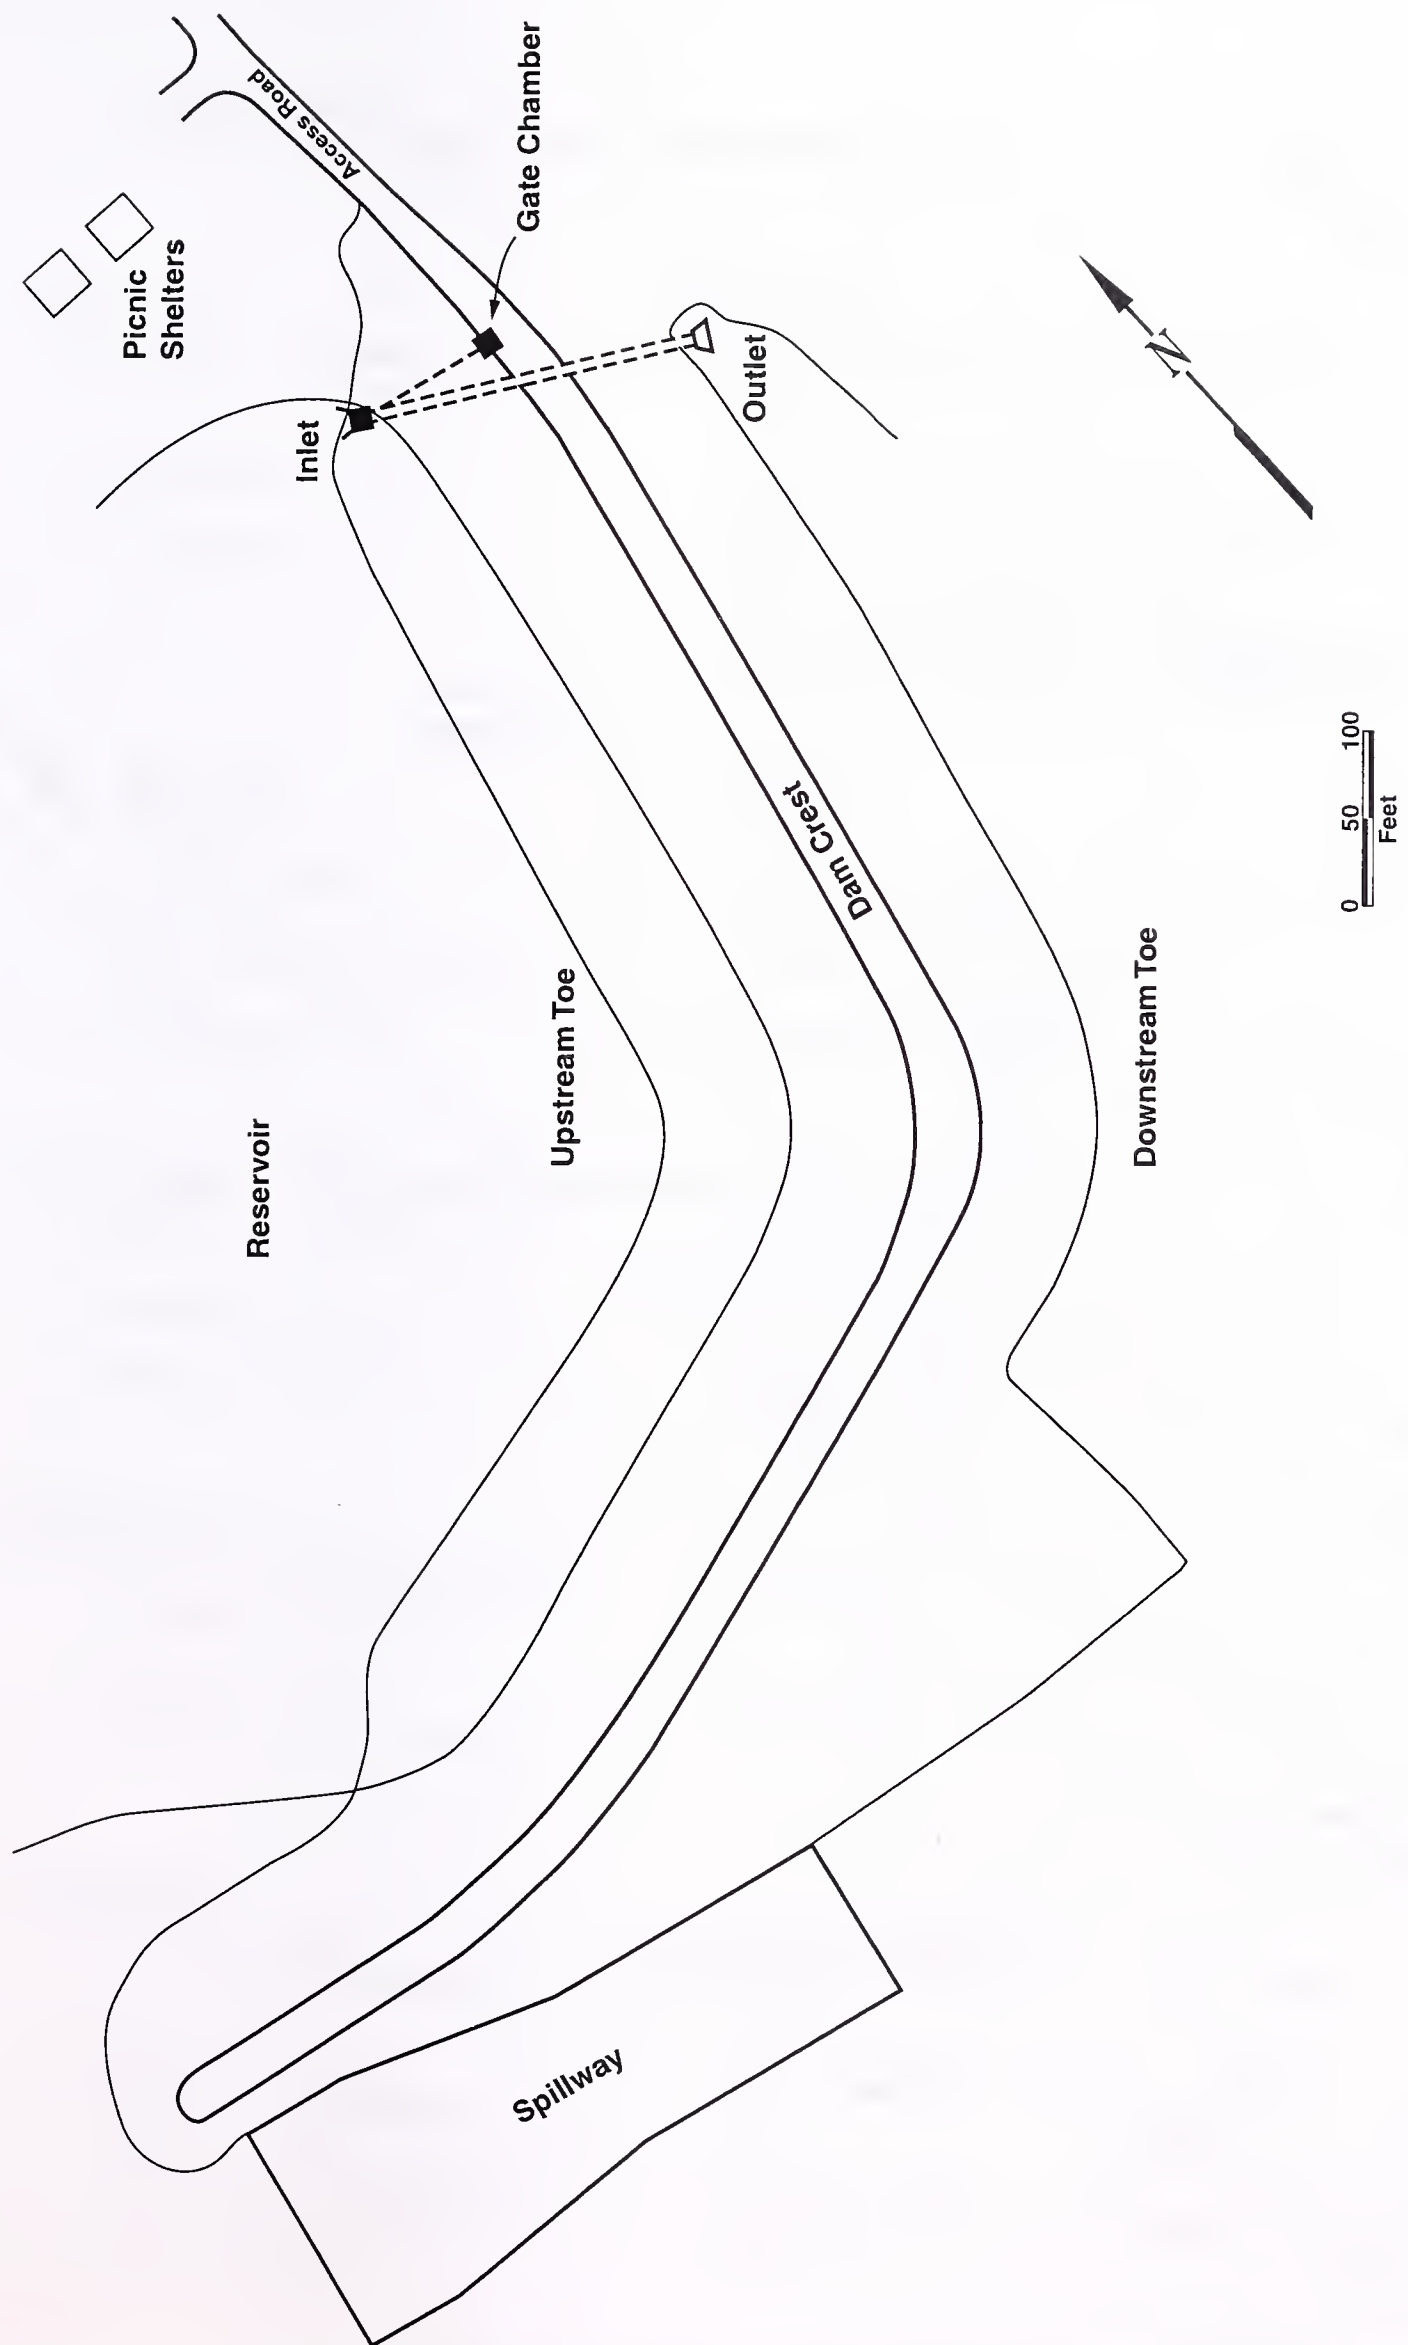


Figure 3. Gartside Dam General Layout

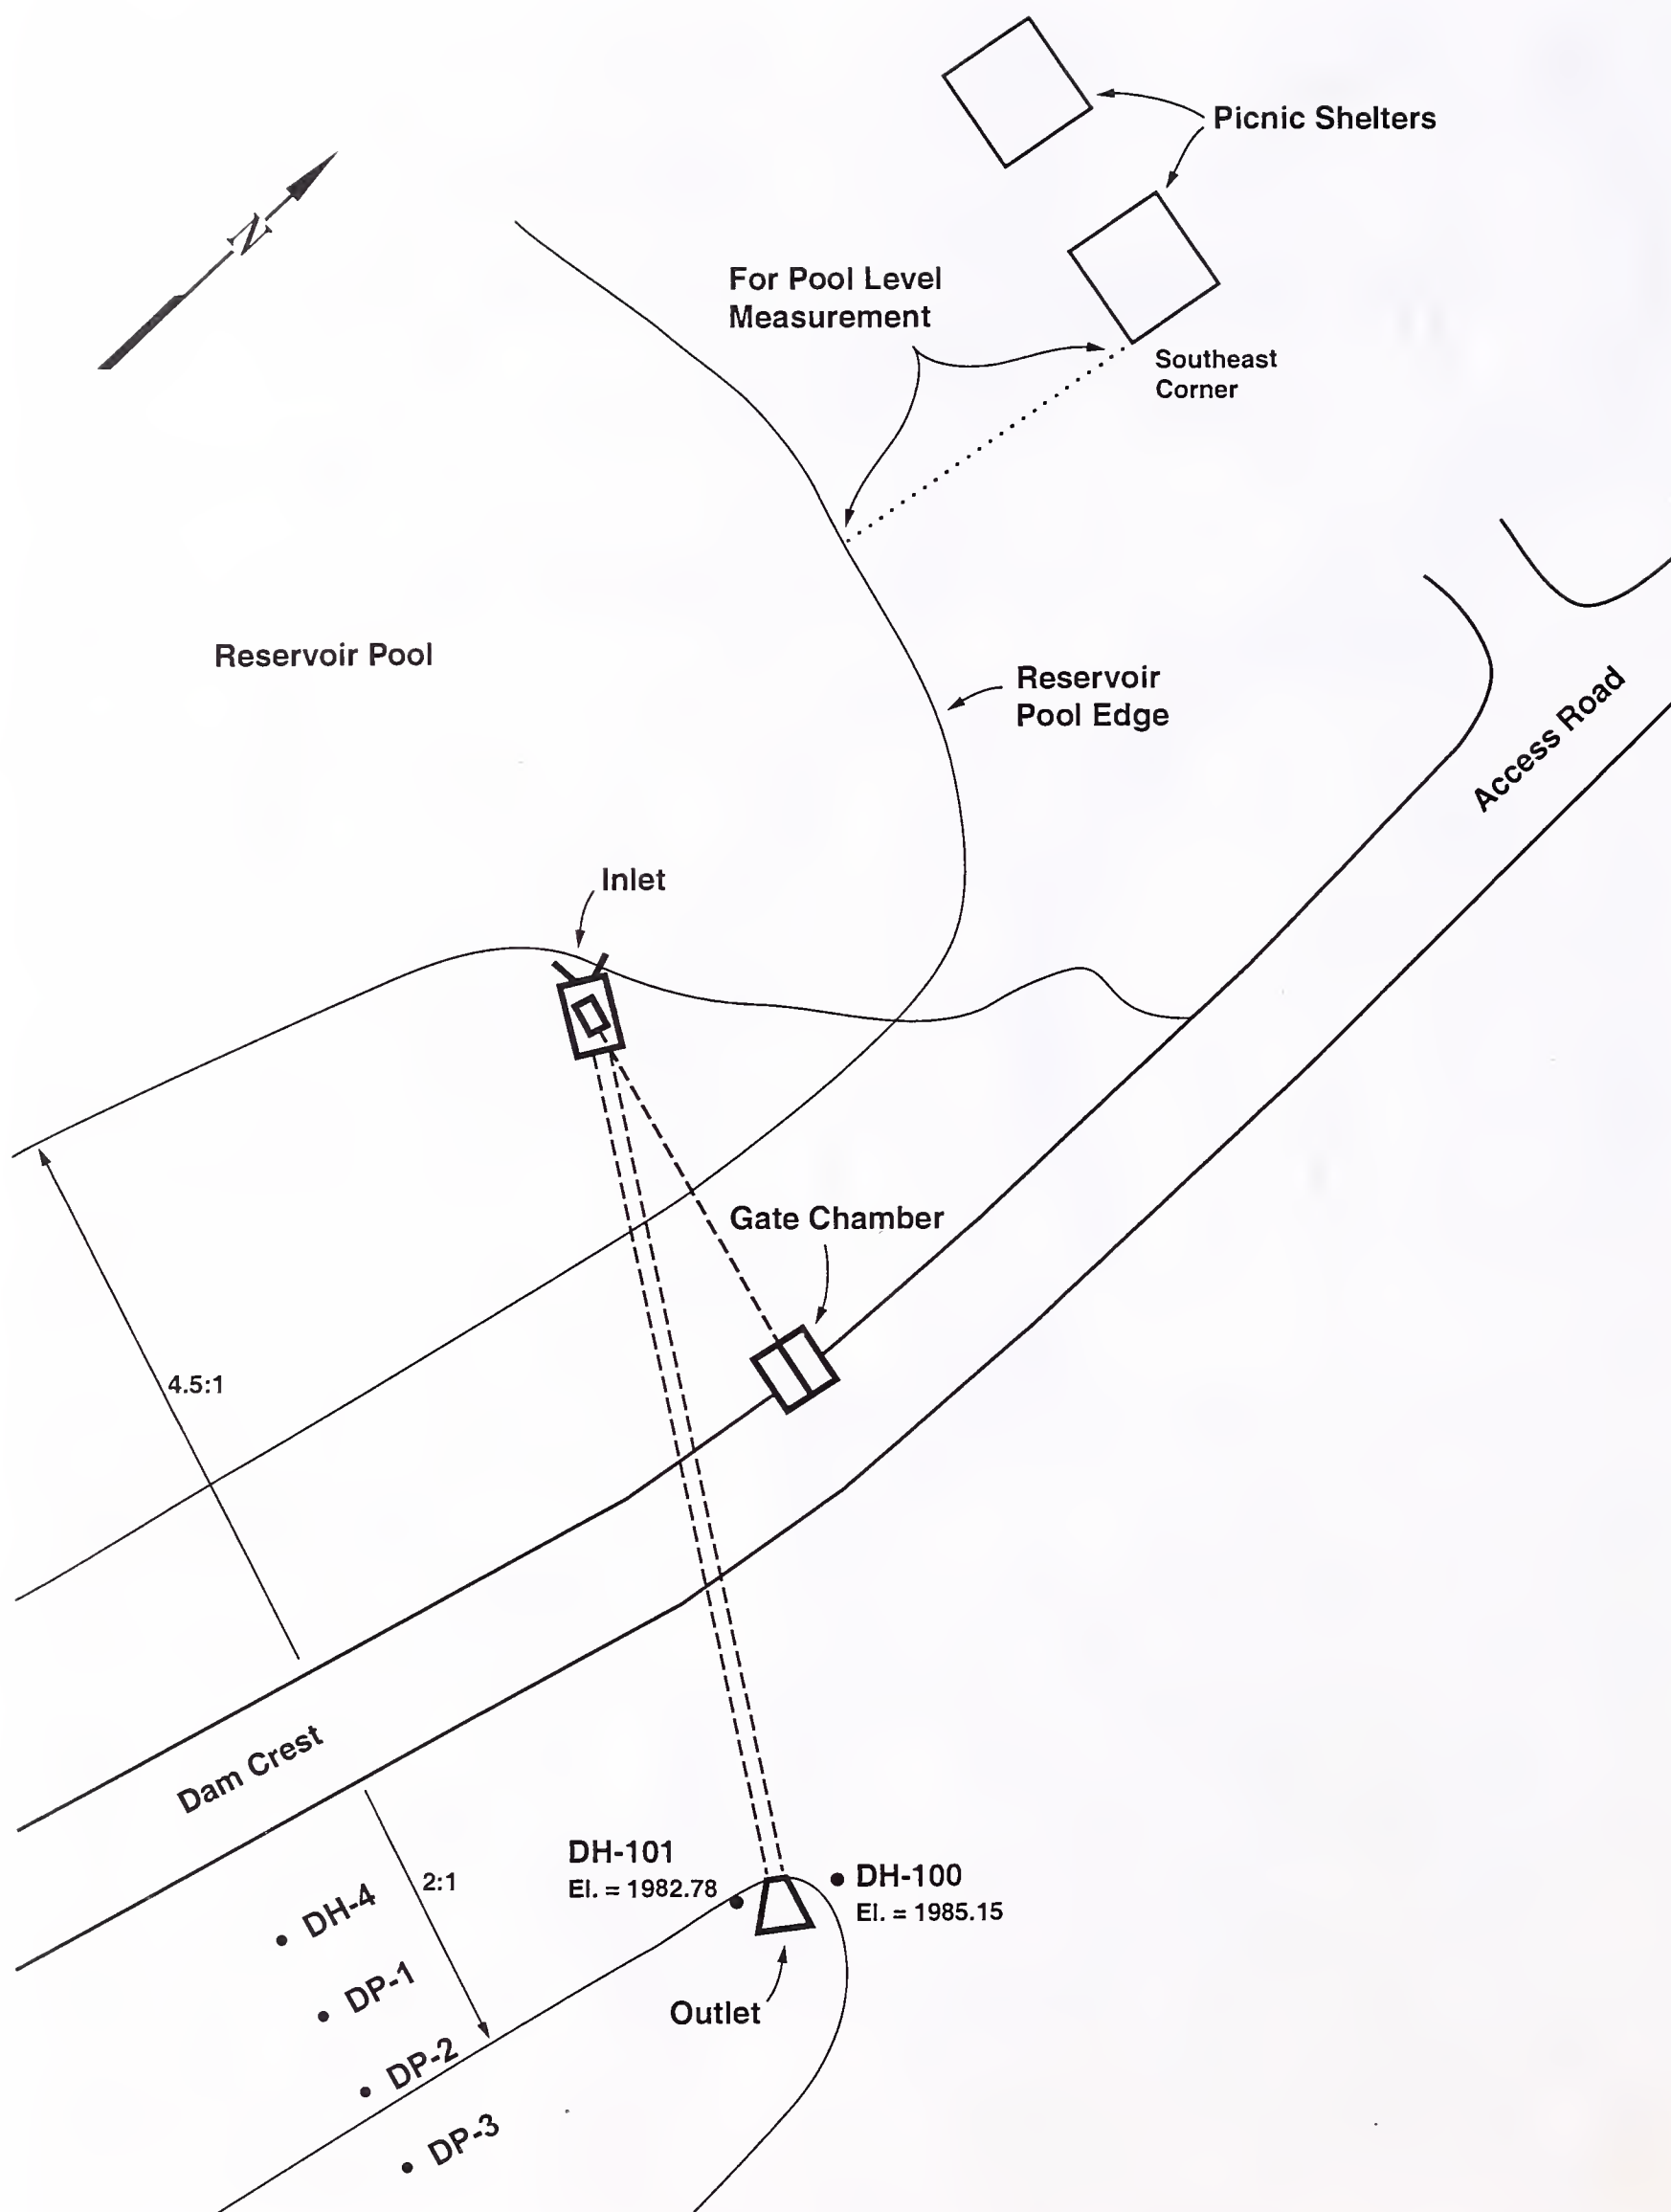


Figure 4. Gartside Dam Monitoring Wells Location

STATISTICAL INFORMATION

1. General

a. Owner	Montana Department of Fish, Wildlife, and Parks
b. Operator	Makoshika Office, DFWP
c. Location	Sections 15 & 16, Township 21 North, Range 58 East, Montana Principal Meridian, 10 miles southwest of Sidney
d. Latitude	47.59°
Longitude	104.27°
e. County--State	Richland County - Montana
f. Watershed Location	Crane Creek
g. Drainage Area	32.5 square miles

2. Principal Elevations (feet above mean sea level)

a. Maximum Dam Crest	2,007.0 feet
b. Spillway Crest	1,997.28 feet
c. Normal Full Pool	1,997.28 feet

3. Reservoir

a. Length of Maximum Pool (approximately)	0.3 miles
b. Surface Area (at normal full pool)	41 acres

4. Storage

a. Total Storage (pool at dam crest)	872 acre-feet
b. Active Storage (pool at spillway crest)	326 acre-feet
c. Maximum Surcharge	546 acre-feet
d. Dead Storage	none

5. Hydrology

- | | |
|---|-----------|
| a. Inflow Design Flood
(50% Probable Maximum Flood -- PMF) | 9,410 cfs |
| b. 100 Yr Flood | 3,460 cfs |
| c. 500 Yr Flood | 5,670 cfs |

6. Embankment (Dam)

- | | |
|---------------------|------------|
| a. Type | Earthfill |
| b. Hydraulic Height | 30 feet |
| c. Crest Length | 1,350 feet |
| d. Crest Width | 28 feet |
| e. Downstream Slope | 1v on 2h |
| f. Upstream Slope | 1v on 4.5h |

7. Outlet Works

- | | |
|------------------------------|---|
| a. Size | 30-inch diameter reinforced concrete pipe |
| b. Length | 201 feet |
| c. Gate | 16" x 16" inclined slide gate
Waterman model S-5000-F
sluice gate |
| d. Control | Wheel in a concrete gate vault structure |
| e. Capacity | |
| Pool at Dam Crest | 40 cfs |
| Pool at Spillway Crest | 33 cfs |
| f. Design Elevations | |
| i. Top Gate Lift Structure | 2007.48 feet |
| ii. Top Intake Structure | 1985.75 feet |
| iii. Inlet Invert Elevation | 1979.3 feet |
| iv. Conduit Invert Elevation | 1979.3 feet |
| g. Trash rack | Yes |
| h. Air Vent | 3-inch diameter steel pipe
exits outside the gate lift vault |

- i. Gate control 1-1/2-inch stainless steel stem extends through an oil seal and operated by a wheel in a concrete gate vault

8. Spillway

- a. Location Right abutment
- b. Type Uncontrolled soil-cement chute with ogee crest control
- c. Chute Width 144 feet at crest tapering to 100 feet at the bottom
- d. Capacity 13,000 cfs
(pool at dam crest)
- e. Length of Chute 395 feet
- f. Entrance Chute Curves from the reservoir to the spillway
- g. Revetment Mattress Attached to the end of the soil-cement spillway to protect the end of the spillway from erosion.
- h. Chute below Spillway Earthen spillway extends about 200-feet downstream from the revetment mattress

OPERATING PROCEDURES

Gartside Dam is operated by the DFWP-Makoshika State Park Office. The primary goal for operating the reservoir is to provide an adequate supply of water to meet recreation and fishery needs.

DAM OPERATOR

The responsibility for the daily operation of the dam and reservoir rests with the DFWP and its dam operator. The dam operator is generally authorized to operate the reservoir to meet the DFWP's goals. The dam operator's specific responsibilities are to:

1. Operate the mechanical features of the outlet works
2. Coordinate filling of the reservoir and the release of water
3. Measure monitoring wells and observe seepage
4. Notify the SWPB and DFWP of unusual occurrences such as impending floods, earthquakes, or excessive seepage.
5. Notify the SWPB and DFWP when spring runoff flows have peaked
6. Perform maintenance tasks.

Typically, the out-going dam operator will train a new operator. The operator's training focuses on the mechanical operation of the gate, measurement of the storage level, monitoring wells, and record keeping.

The dam operator normally is available to observe the dam and perform operating functions as needed during the recreation season. Communication between the dam operator and SWPB and DFWP is by telephone. Although not routinely available, radio communication may be established during emergencies or unusual occurrences, so the dam operator can speak directly with

the SWPB and DFWP (see the **Gartside Dam Emergency Action Plan**).

METHOD AND SCHEDULE OF OPERATION

The reservoir is maintained at a constant pool elevation year-round for the purpose of maintaining the fishery and recreational benefits. The recommended normal pool level is 1996.28 which is one foot below the spillway crest elevation. Although high runoff occasionally results in higher pool levels, the normal pool is kept below the spillway crest to reduce freeze-thaw deterioration in the spillway.

GATE OPERATION

The maximum capacity of the outlet conduit with the reservoir at the dam crest is about 40 cfs. With the pool at the spillway crest, the capacity of the outlet works is about 33 cfs.

The outlet gate is operated manually at the dam crest by opening the steel doors covering the concrete vault structure and turning the gate wheel. The gate should be operated as necessary to maintain the pool one (1) foot below the spillway crest elevation.

The maximum opening for the gate is 17-inches. The 17-inches is measured from the operating wheel to the bottom edge of the limit nut at the end of the gate stem during routine operations. However, a limit nut beneath the gate pedestal will prevent the outlet from being opened past 17-1/2 inches.

The outlet works is intended to be used for controlling the release of water for recreation and fisheries, and not for providing emergency flood relief.

SPILLWAY

With the reservoir at the dam's crest, the maximum capacity of the spillway using a head-discharge relationship is 13,000 cfs. A rating curve for the spillway is included in Appendix A.

SAFE DRAWDOWN

To ensure stability of the embankment, it is recommended that reservoir drawdown not exceed one foot per day. This recommended rate should not be exceeded without the approval of the SWPB.

STORAGE DETERMINATION

Storage in the reservoir and the elevation of the reservoir surface are determined by taking slope measurement. Measure in feet from the 0+00 pin to the water surface. The 0+00 pin is located at the southeast corner of the eastern picnic shelter. Once the slope measurement is determined, the elevation of the reservoir surface and the storage can then be found using the Slope Distance-Elevation-Storage table (Table 1) in Appendix A.

INFLOW AND OUTFLOW MONITORING

There are no inflow or outflow monitoring devices on Crane Creek.

WEATHER MONITORING

The dam operator monitors weather conditions through local weather forecasts and the National Weather Service (NWS).

If sever flooding is anticipated, the NWS Glasgow Office (**1-800-228-9622 or 406-228-2850**) should be contacted for

information about the storm, such as the estimated storm intensity and duration, runoff duration (above base flow), and total flood volume of the storm in the Crane Creek drainage.

SNOTEL Sites: There are no Snotel Sites in the area.

INTERACTION WITH OTHER DAMS

There are no dams of any size above or below Gartside Dam. Flows from the reservoir enter the Yellowstone River about a mile and a half below Gartside Dam.

EMERGENCY

If it appears that the Gartside Dam is about to breach, or during emergency operations, the dam operator will initiate the **Gartside Dam Emergency Action Plan.**

INSPECTION AND MONITORING

The SWPB inspects the dam annually. Appendix B includes an example of a SWPB inspection report form. In addition to annual inspections, SWPB or DFWP personnel will inspect the dam and reservoir during and after heavy runoff, severe rainstorms and severe windstorms; during high storage periods; and after an earthquake. The embankment is monitored by instrumentation.

STRUCTURAL FEATURES INSPECTION

Structural features include the dam embankment, outlet works, and spillway. The SWPB inspects these structures annually as part of its inspection program. Items to be checked or noted include, but are not limited to, the following:

1. Outlet Works
 - a. Any differential settlement or movement resulting in cracking of the conduit
 - b. Erosion of the seals or concrete immediately downstream of the gate
 - c. Major seepage of water into the conduit
 - d. Deterioration of exposed concrete due to freeze/thaw cycles or sulfate reactions
 - e. Operation of the gate
 - f. Air vent for free, unobstructed operation
 - g. All metal for corrosion
 - h. Debris on the intake structure when visible
2. Gate Lift Pedestal
 - a. Any damage or vandalism
 - b. Oil leaks from around the gate stem
 - c. Fill the gate stem sleeve ("T" fitting just upstream from concrete vault) with hydraulic oil, if necessary.

3. Spillway
 - a. Erosion of the spillway channel
 - b. Blockage of the approach or exit channel
 - c. Soil-cement condition
 - d. Stilling basin
 - e. Brush or trees blocking flow into or out of the chutes
4. Embankment
 - a. Erosion
 - b. Settlement, bulges, sink holes, cracking, misalignment
 - c. Riprap displacement
 - d. Damage from burrowing animals
 - e. Excessive vegetation, brush, or trees
 - f. Seepage
 - g. Condition of the road on the dam

RIPRAP INSPECTION

The riprap along the upstream face of the dam consists of gravel and cobble material and should measure at least 24 (twenty-four) inches thick. Immediately after the occurrence of high water, the riprap should be inspected and additional riprap added if needed.

DRAINS

There is a gravel drain system along the toe of the downstream face of the dam. There is also a pipe drain system under the soil-cement spillway and several weep holes in the spillway sides.

SEEPAGE

Five seepage areas have been observed below the dam. A description of these areas follow.

- 1. Area along the entire toe of the dam:** There is a seepage pond/swampy area along the entire toe of the dam. This seepage probably flows into the area through gravels in the foundation. The exploratory drilling program carried out as part of the 1984 Rehabilitation Study found some very permeable zones that are probably contributing to the seepage pond/swamp at the toe of the dam.
- 2. Left abutment contact area:** This seepage area has been commented upon in previous reports. The seepage apparently originates in a coal seam that underlies the abutment. There was no seepage present during the July 10, 2002 inspection.

In 1993, a small slump about 15 feet long by 10 feet wide was noted in the left abutment just downstream from the outlet. From 1993 to 1997 there was no apparent change. In 1998, the left abutment slumped. The upper edge of the slump was demarked by two scarps that were 10 to 15 feet long. The movement was likely precipitated by digging a drainage trench alongside the outlet wall. The slump caused some deflection in DH-100. The drainage trench has been backfilled with permeable material (concrete sand). Currently, there is a good grass cover in the area which is helping to stabilize the area.

- 3. Spillway area:** There is seepage flowing at the end of the soil-cement portion of the spillway, and seepage has been observed flowing out of some of the cracks in the soil-cement floor of the spillway. Also, there are a number of weep pipes located through the spillway sides that have had

observable water flow. There is a coal seam which underlays the spillway that is probably the source of the seepage water in the spillway channel.

- 4. Left abutment area by the outlet/stream channel:** This seepage area is wet (1 to 5 gpm of flowing water) and there is a good growth of water-loving type plants. The seepage originates from a coal seam that exits to the left of the outlet channel. The seepage does not appear to be increasing with time, but the area needs to be observed for any changes or increases in seepage.
- 5. Outlet structure area:** The low-level outlet conduit was replaced in 1990 as part of the rehabilitation project. Since that time there has not been any seepage observed to be exiting around the outlet conduit. Prior to the installation of the drainpipe on the left side of the outlet in 1998, seepage from the left abutment (item #2) flowed over the outlet wingwalls.

MONITORING WELLS

A drilling program was performed during the winter of 1983 and 1984 to identify the soil profile and characteristics. Eight borings were made and monitoring tubes placed in each hole. The majority of these were destroyed during the rehabilitation in 1990. Only monitoring well DH-4 remains. Monitoring well DH-4 is located on the downstream face of the embankment about 170 feet south of the outlet structure.

Since the rehabilitation in 1991, five additional shallow hand driven standpipes have been added. DH-100 and DH-101 are located on each side of the outlet structure. DP-1, DP-2, and DP-3 are downstream from DH-4 approximately 170 feet south of the outlet. The monitoring well locations are shown in Figure 4.

SEEPAGE MONITORING

The monitoring wells and seepage areas at the dam are observed and monitored by the dam operator and may be measured by the SWPB during annual inspections. The instruments are generally measured once per month. The monitoring data is maintained by the SWPB in Helena.

EMBANKMENT MONITORING POINTS

There are 12 monitoring measurement points in the dam embankment. The first line of 6 monuments is approximately 240 feet south of the outlet gate chamber. The second line of 6 monuments is approximately 300 feet south of the outlet gate chamber. Each line of monuments starts at the top of the dam and runs to the toe of the dam. See Project Drawings (Appendix D) for location of monitoring points.

MAINTENANCE

The DFWP is responsible for the routine maintenance of the project. In addition, the SWPB may identify items that need maintenance or repair during the annual inspection.

ROUTINE MAINTENANCE

To protect the dam and keep it in good working order, the dam operator during regular visits to the dam will watch for and identify any potential maintenance requirements. As soon as a need is identified, the dam operator will contact the SWPB and DFWP to schedule and perform the routine maintenance.

Items that may need occasional attention include, but are not limited to:

1. *Lubrication and cleaning of the gate-operating mechanism.*
2. *Debris or silt plugging the inlet or the outlet channel.*
Accumulated debris, trees, or large brush that could affect the operation of these appurtenances should be removed at once.
3. *Erosion gullies on embankment.* Erosion gullies should be checked immediately. Gullies should be filled, compacted, and seeded. Particular attention should be paid to the groin/abutment contact areas.
4. *Rodent damage.* Rodents will be removed or destroyed, and any burrow holes should be filled immediately.
5. *Upstream slope riprap.* The upstream face riprap normally will be observed annually, but may occasionally need repairs because of high water or wave action.
6. *Vegetative cover on downstream slope.* Good vegetative cover must be maintained. Large brush and any trees should be removed.

7. *Noxious weeds.* Noxious weeds on and around the dam embankment and around the reservoir shall be sprayed at least on an annual basis.
8. *Repair joints and seal cracks in the spillway and outlet structure.*

ANNUAL MAINTENANCE

The SWPB conducts annual inspections of Gartside Dam and reservoir. During these inspections, any items requiring annual maintenance will be identified and recorded. Items that may need annual maintenance are the outlet works, gate lift pedestal (grease annually), gate stem (add hydraulic oil as needed), air vent structure, and spillway.

After the inspection, the SWPB sends the DFWP Makoshika Office and DFWP Helene Office a Dam Safety Inspection Report and a Maintenance Report. The reports identify items that need maintenance and provides a schedule of when the maintenance tasks need to be completed. The DFWP is responsible for performing the maintenance items within the times specified.

The DFWP may perform the maintenance tasks. However, major repair's will likely to be handled by a contractor. The SWPB may assist in contracting for repairs and may supervise the repair work.

RECORD-KEEPING

The DFWP and SWPB maintains records, including photographs, of all inspections and maintenance requirements. These records also include flow measurements, storage volumes and monitoring records. Anyone who wants to review these records may do so at the Makoshika State Park Office of the Department of Fish, Wildlife, and Parks.

The dam operator will keep records of the reservoir elevation, seepage observation or measurements, and any unusual conditions.

REFERENCES

U.S. Army Corps of Engineers. November 1980. Phase One Inspection Report, National Dam Safety Program, Gartside Dam, Crane Montana, Richland County, MT-349. Prepared for the State of Montana (DNRC) by CH2M Hill, Bellevue, WA under the U.S. Army Corps of Engineers' National Dam Safety Program.

HKM Associates. March 1984. Gartside Dam Emergency Warning Plan

HKM Associates. April 1984. Gartside Dam Rehabilitation Study

HKM Associates. February 1988. Report On Monitor Well Construction Program Gartside Dam

HKM Associates. July 1991. Gartside Dam Rehabilitation Design Report

US Bureau of Reclamation, 1988. Training Aids for Dam Safety, Module: Inspection on Embankment Dams.

APPENDICES

APPENDIX A
RATING CURVES AND TABLES

**TABLE 1. SLOPE- ELEVATION-STORAGE TABLE
GARTSIDE RESERVOIR**

Spillway Crest = 1997.28 feet

Dam Crest = 2007.00 feet

Based on survey of June 21, 1995.

The 0+00 pin is located at the southeast corner of the eastern picnic shelter.

DISTANCE feet	ELEVATION feet	STORAGE acre-feet		DISTANCE feet	ELEVATION feet	STORAGE 355.00
Pin 0+00	2001.74	539		36	1998.37	367
1	2001.11	505		37	1998.23	361
2	2001.05	502		38	1998.08	355
3	2001.00	499		39	1997.93	350
4	2000.95	497		40	1997.78	345
5	2000.89	494		41	1997.63	339
6	2000.84	492		42	1997.48	334
7	2000.79	489		43	1997.33	327
8	2000.74	487		44	1997.18	320
9	2000.69	484		45	1997.03	313
10	2000.64	482		46	1996.88	308
11	2000.58	479		47	1996.72	304
12	2000.53	477		48	1996.57	299
13	2000.48	474		49	1996.42	294
14	2000.41	470		50	1996.29	289
15	2000.34	467		51	1996.19	284
16	2000.27	463		52	1996.08	279
17	2000.19	459		53	1995.97	274
18	2000.12	455		54	1995.87	270
19	2000.04	452		55	1995.76	265
20	1999.97	448		56	1995.65	261
21	1999.90	444		57	1995.55	256
22	1999.82	440		58	1995.44	252
23	1999.75	436		59	1995.33	248
24	1999.67	432		60	1995.23	245
25	1999.60	428		61	1995.12	241
26	1999.50	424		62	1995.01	237
27	1999.38	418		63	1994.94	235
28	1999.27	412		64	1994.87	232
29	1999.16	406		65	1994.80	230
30	1999.05	400		66	1994.73	228
31	1998.93	395		67	1994.66	226
32	1998.82	389		68	1994.59	223
33	1998.71	384		69	1994.52	221
34	1998.60	378		70	1994.45	219
35	1998.49	372				
DISTANCE	ELEVATION	STORAGE		DISTANCE	ELEVATION	STORAGE

TABLE 1. SLOPE- ELEVATION-STORAGE TABLE (continued)
GARTSIDE RESERVOIR

DISTANCE feet	ELEVATION feet	STORAGE acre-feet		DISTANCE feet	ELEVATION feet	STORAGE acre-feet
71	1994.38	216		116	1987.30	38
72	1994.31	214		117	1987.00	32
73	1994.24	211		118	1986.70	29
74	1994.17	209		119	1986.40	26
75	1994.10	207		120	1986.10	19
76	1994.04	204		121	1985.80	17
77	1993.99	202		122	1985.50	15
78	1993.95	200		123	1985.20	11
79	1993.90	199		124	1984.90	10
80	1993.85	197		125	1984.60	8
81	1993.81	195		126	1984.30	7
82	1993.76	193		127	1984.00	5
83	1993.67	192		128	1983.70	3
84	1993.59	190				
85	1993.50	188				
86	1993.42	185				
87	1993.33	183				
88	1993.24	180				
89	1993.16	177				
90	1993.07	175				
91	1992.99	172				
92	1992.90	168				
93	1992.77	165				
94	1992.60	162				
95	1992.42	158				
96	1992.25	153				
97	1992.08	148				
98	1991.91	143				
99	1991.73	139				
100	1991.56	134				
101	1991.39	130				
102	1991.16	123				
103	1990.91	116				
104	1990.67	110				
105	1990.42	104				
106	1990.17	98				
107	1989.93	92				
108	1989.68	87				
109	1989.41	81				
110	1989.11	69				
111	1988.80	64				
112	1988.50	59				
113	1988.20	54				
114	1987.90	49				
115	1987.60	43				
DISTANCE	ELEVATION	STORAGE		DISTANCE	ELEVATION	STORAGE

TABLE 2. ACTIVE STORAGE IN ACRE-FEET


GARTSIDE DAM

Elevation	0.0	0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9
1982	0	0	1	1	2	2	2	3	3	4
1983	4	4	4	4	4	5	5	5	5	5
1984	5	6	6	7	7	8	9	9	10	10
1985	11	12	13	13	14	15	16	17	17	18
1986	19	20	22	23	24	26	27	28	29	31
1987	32	34	35	37	39	41	42	44	46	47
1988	49	51	53	55	57	59	61	63	65	67
1989	69	71	74	76	78	81	83	85	87	90
1990	92	94	97	99	102	104	106	109	111	114
1991	116	119	121	124	127	130	132	135	138	140
1992	143	146	149	152	155	158	160	163	166	169
1993	172	175	178	182	185	188	191	194	198	201
1994	204	207	211	214	217	221	224	227	230	234
1995	237	241	244	248	252	256	259	263	267	270
1996	274	278	282	286	290	294	297	301	305	309
1997	313	317	321	326	330	334	338	342	347	351
1998	355	360	364	369	373	378	382	387	391	396
1999	400	405	410	414	419	424	429	434	438	443
2000	448	453	458	463	468	474	479	484	489	494
2001	499	504	510	515	521	526	531	537	542	548
2002	553	559	564	570	576	582	587	593	599	604
2003	610	616	622	628	634	640	646	652	658	664
2004	670	676	683	689	696	702	708	715	721	728
2005	734	741	747	754	761	768	774	781	788	794
2006	801	808	815	822	829	837	844	851	858	865
2007	872									

NOTE: Storage table data derived from HKM design report, dated July, 1991.
 Spillway Crest Elevation 1997.28 feet Storage 325 acre-feet
 Dam Crest Elevation 2007.0 feet Storage 872 acre-feet

TABLE 3. SPILLWAY DISCHARGE**GARTSIDE DAM**

Depth Over Crest (feet)	Elevation (feet)	Discharge (cfs)
0.00	1997.28	0
0.22	1997.50	33
0.72	1998.00	157
1.22	1998.50	443
1.72	1999.00	786
2.72	2000.00	1625
3.72	2001.00	2824
4.72	2002.00	4000
5.72	2003.00	5579
6.72	2004.00	7176
7.72	2005.00	8941
8.72	2006.00	10800
9.72	2007.00	12800

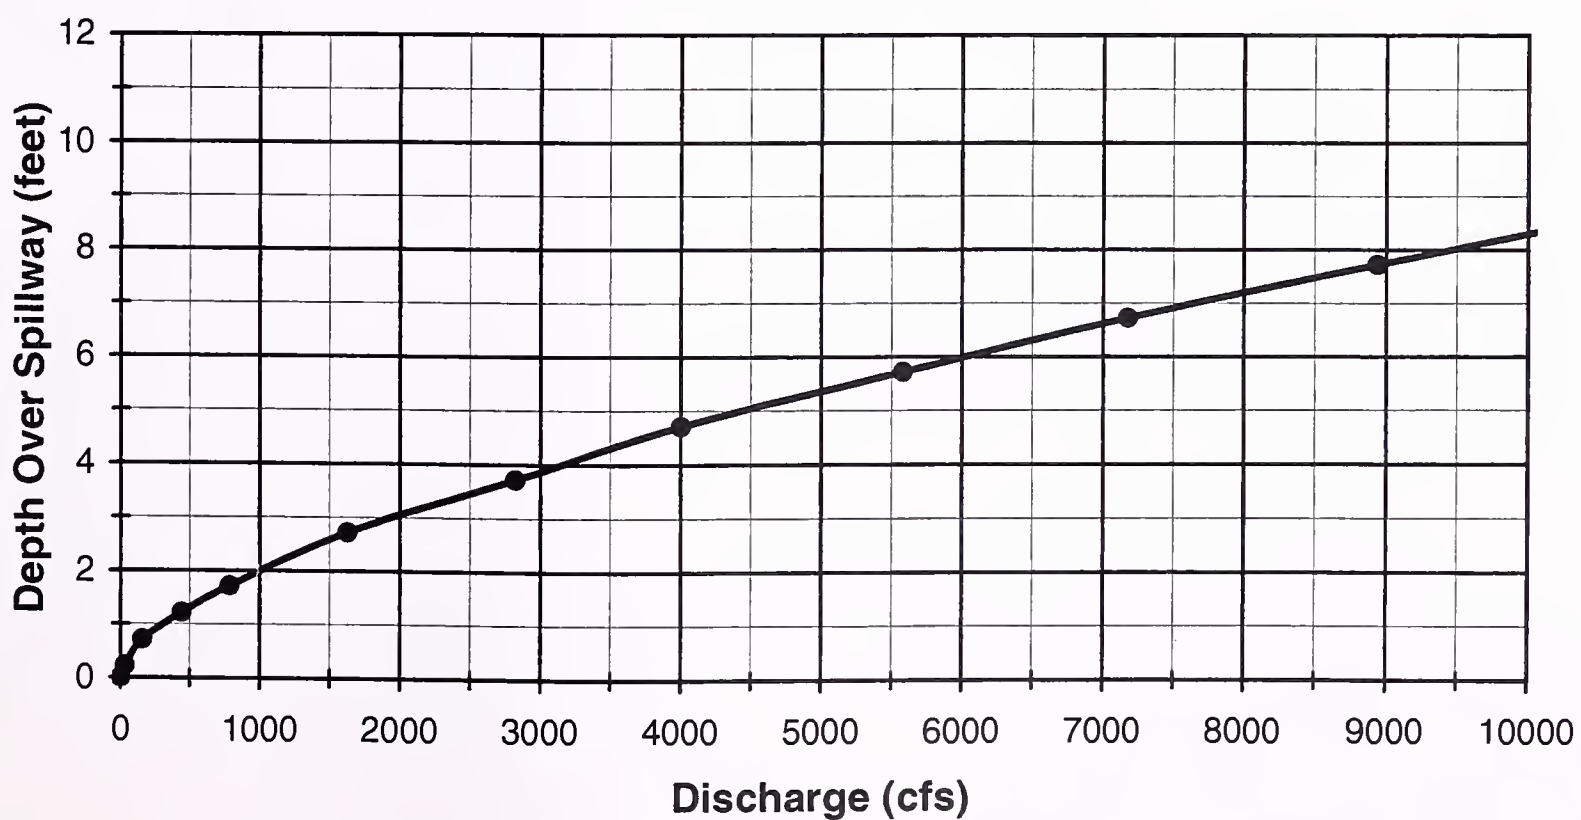**GARTSIDE DAM
SPILLWAY RATING CURVE**

Note: Data from HKM Rehabilitation Report (7/1991).

APPENDIX B
INSPECTION CHECKLIST

DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION
DAM SAFETY INSPECTION REPORT

NAME OF DAM _____
DATE INSPECTED _____

INVENTORY NO. _____
HAZARD CATEGORY _____
TYPE OF DAM _____
YEAR BUILT _____

OWNER _____
OPERATOR _____
STREAM _____
DRAINAGE AREA _____

Reservoir Storage Status

	Water Surface Elevation (feet)	Storage (acre-feet)
At time of inspection	_____	_____
At spillway crest	_____	_____
At min. dam crest elevation	_____	_____

ITEM	YES	NO	REMARKS
------	-----	----	---------

1. EMBANKMENT

A. Crest -- Height= Length= Width=

(1) Any visual settlements?			
(2) Any misalignments?			
(3) Any cracking?			
(4) Any traffic damage?			
(5) Other?			

ITEM	YES	NO	REMARKS
------	-----	----	---------

1. EMBANKMENT (continued)

B. Upstream Face -- Slope=

(1) Any erosion?			
(2) Any longitudinal cracks?			
(3) Any transverse cracks?			
(4) Is riprap protection adequate?			
(5) Any stone deterioration?			
(6) Any visual settlement, slumps, sloughing, depressions or bulges?			
(7) Adequate grass cover?			
(8) Debris on the dam face?			
(9) Other?			

C. Downstream Face--Slope=

(1) Any erosion?			
(2) Any longitudinal cracks?			
(3) Any transverse cracks?			
(4) Any visual settlement, slumps, sloughing, depressions or bulges?			
(5) Is the toe drain dry?			
(6) Are the relief wells flowing?			
(7) Any boils at the toe?			
(8) Any seepage areas?			
(9) Any traffic or animal damage?			
(10) Any burrowing animals?			
(11) Adequate grass cover?			
(12) Other?			

D. Amount and Type of Vegetation on the Dam

--

ITEM	YES	NO	REMARKS
------	-----	----	---------

2. ABUTMENT CONTACTS

A) Any erosion?			
B) Any visual differential movement?			
C) Any cracks?			
D) Any seepage present?			
E) Other?			

3. OUTLET WORKS

A. Intake Structure -- Size=

(1) Any settlement?			
(2) Any tilting?			
(3) Do concrete surfaces show:			
a. Spalling?			
b. Cracking?			
c. Erosion?			
d. Exposed reinforcement?			
(4) Do joints show:			
a. Displacement or offset?			
b. Loss of joint material?			
c. Leakage?			
(5) Metal appurtenances:			
a. Any corrosion present?			
b. Any breakage present?			
(6) Trash rack?			
a. Condition?			
b. Anchor system secure?			
(7) Other?			

ITEM	YES	NO	REMARKS
------	-----	----	---------

3. OUTLET WORKS (continued)

B. Conduit -- Type = Size =

(1) Do concrete surfaces show:			
a. Spalling?			
b. Cracking?			
c. Erosion?			
d. Exposed reinforcement?			
(2) Do joints show:			
a. Displacement or offset?			
b. Loss of joint material?			
c. Leakage?			
(3) Is the conduit metal?			
a. Any corrosion present?			
b. Protective coatings adequate?			
(4) Is the conduit misaligned?			
(5) Any calcium deposits?			
(6) Other?			

C. Gates and Tower

(1) Gates:			
a. Size: Operating:		Emergency:	
b. Type: Operating:		Emergency:	
(2) Controls operational?			
(3) Controls lubricated?			
(4) Operational problems?			
(5) Leakage around gates?			
(6) Condition of gate seals?			
(7) Any cavitation damage? If so, describe?			
(8) Describe air vent-size and condition.			

ITEM	YES	NO	REMARKS
------	-----	----	---------

3. OUTLET WORKS (continued)

C. Gates and Tower (continued)

(9) Is there a jet pump?			
a. Is it operational?			
b. Leakage?			
(10) Is the tower dry? ____ wet?			
(11) Any seepage in the tower?			
(12) Condition of the tower?			
(13) Any safety problems?			
(14) Ladder in good condition?			
(15) Condition of the gatehouse?			
(16) Emergency plan completed for the dam?			
a. Posted in the gatehouse?			
(17) Other?			

D. Stilling Basin

(1) Do concrete surfaces show:			
a. Spalling?			
b. Cracking?			
c. Erosion?			
d. Exposed reinforcement?			
(2) Do joints show:			
a. Displacement or offset?			
b. Loss of joint material?			
c. Leakage?			
(3) Do energy dissipaters show:			
a. Signs of deterioration?			
b. Are they covered with debris?			
(4) Other?			

ITEM	YES	NO	REMARKS
------	-----	----	---------

3. OUTLET WORKS (continued)

E. Downstream Channel

(1) Is the channel:			
a. Eroding or backcutting?			
b. Sloughing?			
c. Obstructed?			
(2) Is released water:			
a. Undercutting the outlet?			
b. Eroding the embankment?			
(3) Other?			

4. SPILLWAY

A. Description

(1) Location?			
(2) Type of Spillway?			
(3) Size of Spillway?			
(4) Spillway lining?			
(5) Is there a weir?			
(6) Is the spillway in good condition?			
(7) Any drains?			
a. Describe the condition of drains.			

B. Does spillway show:

(1) Any cracking concrete?			
(2) Any spalling concrete?			
(3) Any exposed reinforcement in the concrete?			
(4) Any erosion?			

ITEM	YES	NO	REMARKS
------	-----	----	---------

4. SPILLWAY (continued)

4. B. Does spillway show: (continued)

(5) Any slope sloughing?			
(6) Any obstructions?			
(7) Displacement or offset joints?			
(8) Loss of joint material?			
(9) Leakage at the joints?			
(10) Other?			

C. Do the energy dissipaters show:

(1) Signs of deterioration?			
(2) Any cracking?			
(3) Any spalling?			
(4) Any exposed reinforcement?			
(5) Are they covered with debris?			
(6) Other?			

D. Has release water:

(1) Eroded the embankment?			
(2) Undercut the outlet?			
(3) Eroded the downstream channel?			
(4) Other?			

E. Emergency Spillway

(1) Is there an emergency spillway?			(If YES, describe)

ITEM	YES	NO	REMARKS
------	-----	----	---------

5. RESERVOIR CONTROL

A) Recent upstream development?			
B) Recent downstream development?			
C) Slides in reservoir area?			
D) Change in reservoir operation?			
E) Large impoundment upstream?			
F) Any debris in the reservoir?			
G) Other?			

6. INSTRUMENTATION

A) List type(s) of instrumentation:			
B) In good condition?			
C) Read periodically?			
D) Is data available?			
E) Include all data gathered since last report.			

7. DOWNSTREAM CONDITION

A. Downstream Land Use.

--

This dam was inspected by:

Additional comments and recommendations.

APPENXIC C
DISTRUBUTION LIST

GARTSIDE DAM DISTRUBUTION LIST

	<u>Number Of Copies</u>
1. State Water Projects Bureau Kevin Smith Rob Kingery Art Taylor (2) Dam Safety Engineer Bob Arrington Dolores Eustice	7
2. DNRC Information Services Section	1
3. DNRC Regional Office Bob Larson Marvin Cross	2
4. DNRC Dam Safety	1
5. Department of Fish, Wildlife, and Parks Dale Carlson – Glendive, Park Operations Specialist Paul Valle – Helena – Design & Construction Bureau Chief Ken Phillips – Helena – Design & Construction Bureau	3
6. Dam Operator Blaine Getchell	1
7. State Library – Attn: Roberta Gebhart	4
8. Extra	2
=====	
TOTAL	21

APPENDIX D

PROJECT DRAWINGS

(NOTE: These reduced project drawings are "As Builts". The drawing should be used for reference only. The SWPB has the full size project drawings.)


GRAPHIC SCALE



(IN FEET)
1 inch = 100 ft.

CONTROL POINTS

Point	Northing	Eastings	Elevation
D10	19693.89	19697.02	2007.32
D11	19439.64	19489.85	2007.28
D12	19385.07	19289.21	2007.77
D100	20057.19	19831.01	2007.89
D101	19878.17	20030.16	2025.47

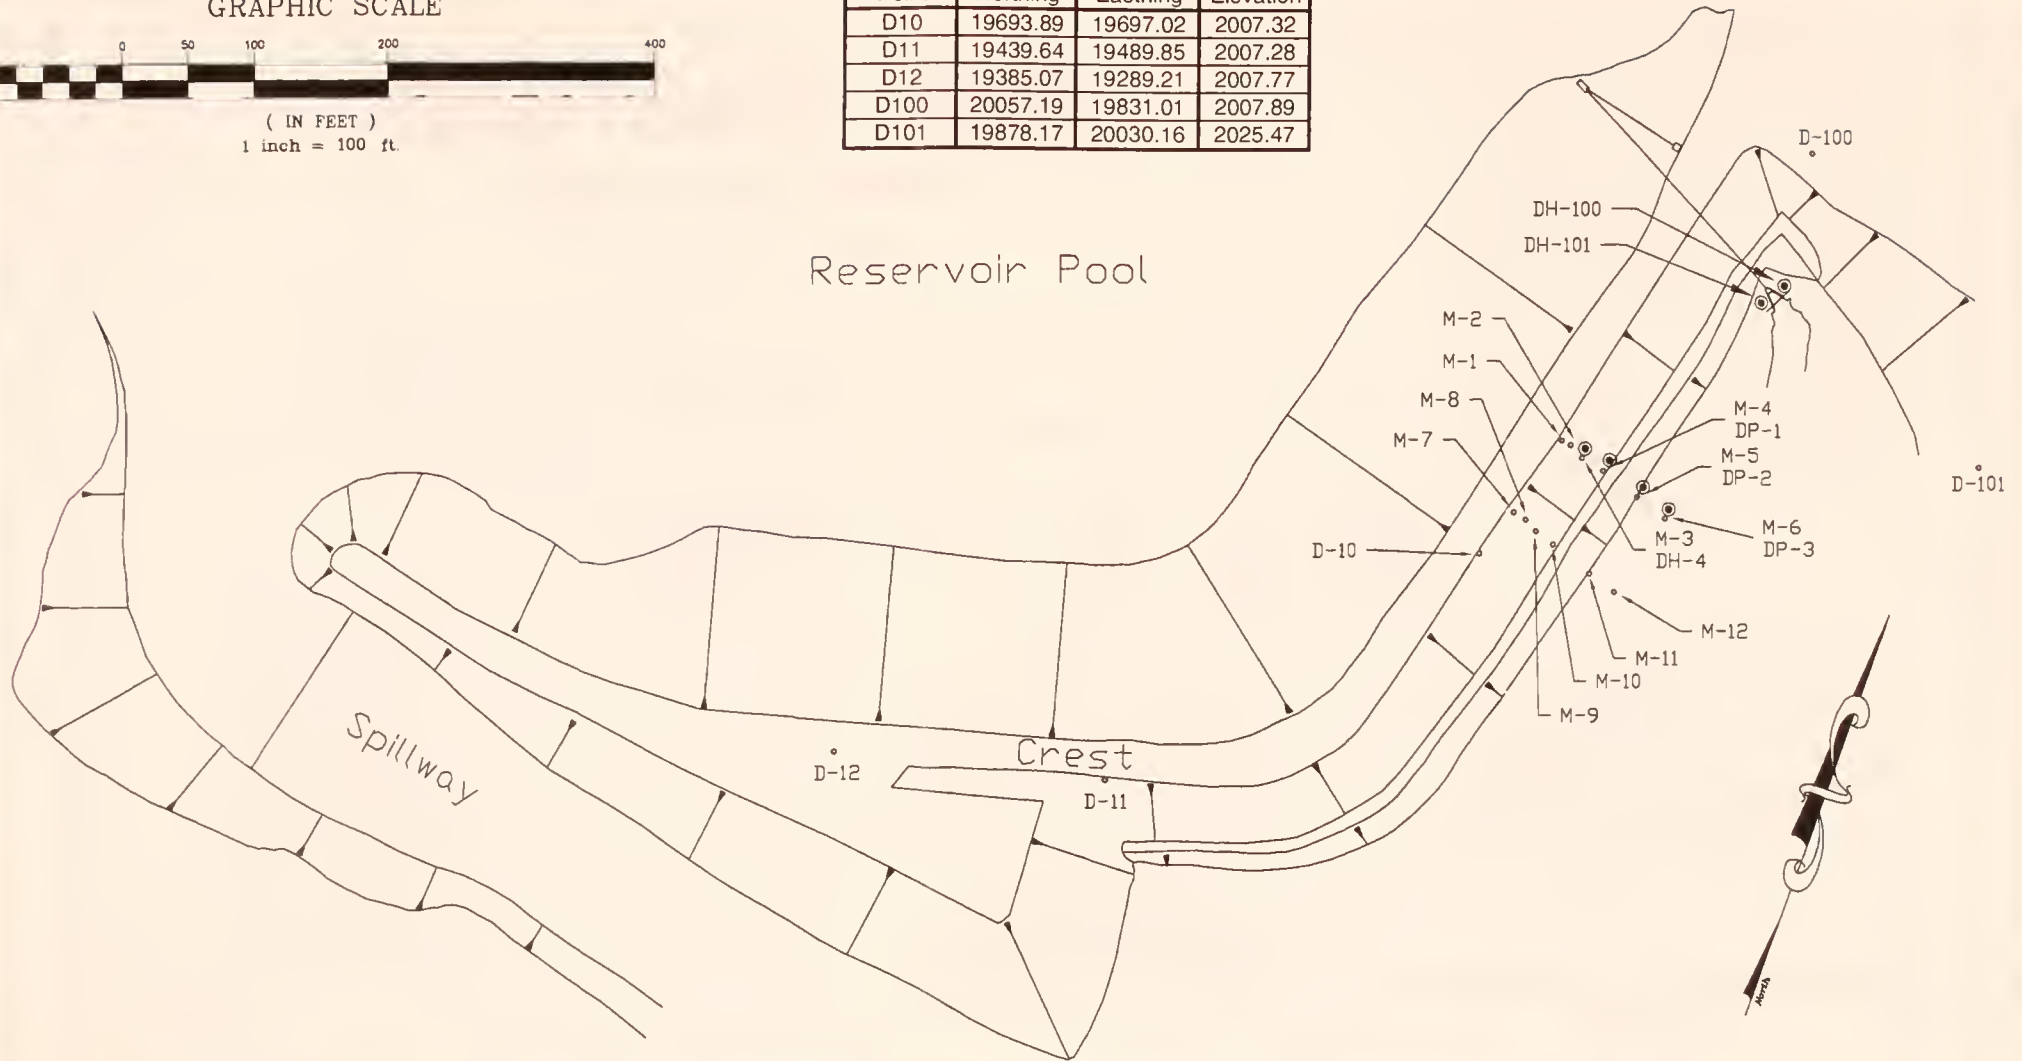

Robert Lingery 6/26/2000
 DRAWN BY: DATE: REVISED BY: DATE: APPROVED BY: DATE:
 CHECKED BY: DATE: APPROVED BY: DATE: APPROVED BY: DATE:



Montana Fish,
Wildlife & Parks

Gartside
Site Plan

SHEET 1 of 1

CONSTRUCTION DRAWINGS OF GARTSIDE DAM

REHABILITATION PROJECT

Richland County, Montana

.....

MONTANA DEPARTMENT OF FISH, WILDLIFE AND PARKS

IN COOPERATION WITH

MONTANA DEPARTMENT OF NATURAL RESOURCES AND CONSERVATION

prepared by:

**HKM ASSOCIATES
ENGINEERS - PLANNERS**
P.O. Box 31318
Airport Industrial Park
Billings, Montana 59107

J.P. Boudin
PRINCIPAL IN CHARGE



Don L. Dyer
PROJECT ENGINEER
1984 DESIGN



James H. Thorne
1990 REVISIONS

INDEX OF DRAWINGS


1. INDEX OF DRAWINGS
2. PLAN VIEW OF DAM
3. SPILLWAY PLAN AND PROFILE
- 3A. SPILLWAY CROSS SECTIONS
4. SPILLWAY CROSS SECTIONS
5. EMBANKMENT CROSS SECTIONS
6. OUTLET CONDUIT PLAN AND PROFILE
7. OUTLET STRUCTURE DETAILS
8. INLET STRUCTURE DETAILS
9. GATE STEM AND PEDESTAL DETAILS
10. LOGS OF EXPLORATION HOLES
11. BREACH DETAILS

GENERAL NOTES

1. ALL ELEVATIONS IN FEET NATIONAL GEODETIC VERTICAL DATUM (NGVD).
2. ALL STATIONING REFERS TO CONTROL LINE OF CONSTRUCTION AND IS THE MEASURED HORIZONTAL DISTANCE.
3. ALL EARTH FILL SHALL BE COMPACTED TO 95% OF MAXIMUM DRY DENSITY AS DETERMINED BY ASTM D698 UNLESS OTHERWISE SPECIFIED.
4. THE DAM WAS BREACHED IN 1985 ALONG THE OUTLET CONDUIT. THESE PLANS WERE ORIGINALLY COMPLETED IN 1984, PRIOR TO BREACHING. DETAILS OF THE BREACH AREA ARE SHOWN ON SHEET 11. TOPOGRAPHY PRIOR TO THE BREACH IS SHOWN ON OTHER SHEETS.

STRUCTURAL NOTES

1. ALL EXPOSED CONCRETE EDGES SHALL BE CHAMFERED 5/8 INCH.
2. INDICATED REINFORCING BAR SPACING IS CENTER TO CENTER OF BARS. BAR COVER IS CLEAR DISTANCE BETWEEN SURFACE OF BAR AND FACE OF CONCRETE, AND SHALL BE 2 INCHES FOR FORMED AND TOP SURFACES, AND 3 INCHES FOR SURFACES POURED AGAINST EARTH, UNLESS OTHERWISE SHOWN.
3. IN SECTIONS HAVING A SINGLE MAT OF REINFORCING, THE STEEL SHALL BE POSITIONED IN THE CENTER OF THE SECTION UNLESS OTHERWISE SHOWN.
4. ALL BAR SPLICES NOT SHOWN ON THE DRAWINGS SHALL BE LAPPED A MINIMUM OF 16 INCHES.

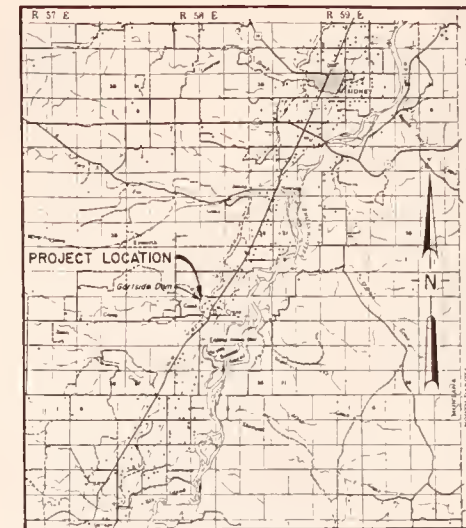

VICINITY MAP

Scale
0 1 2 3
Miles




**CONSTRUCTION RECORD DRAWINGS
MAY 1991**

LEGEND

- TP TEST PIT (Exploration Performed July 6, 1983) SEE SHEET 11 FOR LOCATION OF TP-1 and TP-2
- OH ORILL HOLE (Exploration Performed December 1983, January 1984)
- TP TEST PIT (Exploration Performed March 27, 29, 1984)
- RMH SURVEY REFERENCE MARKER FOR ORILL HOLE LOCATIONS
- SC SURVEY CONTROL POINT

CURVE DATA

NO.	Δ	O	R	T	L
①	90°00'00"	301.57'	19.00'	19.00'	29.85'
②	28°19'41"	11.77'	487.00'	122.90'	240.78'
③	60°38'13"	30.97'	185.00'	108.19'	195.79'
④	80°38'13"	47.75'	120.00'	70.17'	127.00'
⑤	13°36'33"	13.17'	435.00'	59.82'	118.51'
⑥	55°00'00"	163.70'	35.00'	18.22'	33.60'



DETAIL "A"



ALL TREES AND BRUSH TO BE CLEARED
TREES WITH TRUNK DIAMETERS GREATER
THAN 1 INCH TO BE GRUBBED TO 12 INCHES
BELOW SURFACE

CONSTRUCT UPSTREAM BEACHING SLOPE
SEE SHEET 5

SEE SIGN POST DETAIL
SHT. 9

NOTE: The dam was breached in 1983
along the outlet conduit.
SEE SHEET 11

OUTLET CONDUIT

DAM CONTROL LINE
MATCH EXIST. GRADE @ WIDTH
OF ROAD AT EXIST. CULVERT

GATE LIFT STEM

EXIST. RISER INLET PIPE
INLET INV. EL. 1979.75
CREST EL. 1995.20

LEFT ABUTMENT
(convention determined
looking downstream)

END EL. 2007.0 @ BEGIN
MINUS ROAD GRADE

TO BE REMOVED

EXIST. CONDUIT OUTLET INV. EL. 1977.71 (TO BE REMOVED)

SEE SHEET 11

EXIST. IRRIGATION INLET INV. EL. 1978.76 (TO BE REMOVED)

OUTLET CHANNEL
EXCAVATION

EXIST. IRRIGATION CONDUIT (TO BE REMOVED)

CONSTRUCT EARTH
BERM - SEE SHT. 5

REGRADE SLOPE ONLY
EXCEPT AT OUTLET @
STA 10+00. SEE SHEET 5

BERM EL. 1985.0

TP-105

TP-104

TP-103

TP-102

TP-101

TP-100

TP-99

TP-98

TP-97

TP-96

TP-95

TP-94

TP-93

TP-92

TP-91

TP-90

TP-89

TP-88

TP-87

TP-86

TP-85

TP-84

TP-83

TP-82

TP-81

TP-80

TP-79

TP-78

TP-77

TP-76

TP-75

TP-74

TP-73

TP-72

TP-71

TP-70

TP-69

TP-68

TP-67

TP-66

TP-65

TP-64

TP-63

TP-62

TP-61

TP-60

TP-59

TP-58

TP-57

TP-56

TP-55

TP-54

TP-53

TP-52

TP-51

TP-50

TP-49

TP-48

TP-47

TP-46

TP-45

TP-44

TP-43

TP-42

TP-41

TP-40

TP-39

TP-38

TP-37

TP-36

TP-35

TP-34

TP-33

TP-32

TP-31

TP-30

TP-29

TP-28

TP-27

TP-26

TP-25

TP-24

TP-23

TP-22

TP-21

TP-20

TP-19

TP-18

TP-17

TP-16

TP-15

TP-14

TP-13

TP-12

TP-11

TP-10

TP-9

TP-8

TP-7

TP-6

TP-5

TP-4

TP-3

TP-2

TP-1

TP-0

TP-100

TP-99

TP-98

TP-97

TP-96

TP-95

TP-94

TP-93

TP-92

TP-91

TP-90

TP-89

TP-88

TP-87

TP-86

TP-85

TP-84

TP-83

TP-82

TP-81

TP-80

TP-79

TP-78

TP-77

TP-76

TP-75

TP-74

TP-73

TP-72

TP-71

TP-70

TP-69

TP-68

TP-67

TP-66

TP-65

TP-64

TP-63

TP-62

TP-61

TP-60

TP-59

TP-58

TP-57

TP-56

TP-55

TP-54

TP-53

TP-52

TP-51

TP-50

TP-49

TP-48

TP-47

TP-46

TP-45

TP-44

TP-43

TP-42

TP-41

TP-40

TP-39

TP-38

TP-37

TP-36

TP-35

TP-34

TP-33

TP-32

TP-31

TP-30

TP-29

TP-28

TP-27

TP-26

TP-25

TP-24

TP-23

TP-22

TP-21

TP-20

TP-19

TP-18

TP-17

TP-16

TP-15

TP-14

TP-13

TP-12

TP-11

TP-10

TP-9

TP-8

TP-7

TP-6

TP-5

TP-4

TP-3

TP-2

TP-1

TP-0

TP-100

TP-99

TP-98

TP-97

TP-96

TP-95

TP-94

TP-93

TP-92

TP-91

TP-90

TP-89

TP-88

TP-87

TP-86

TP-85

TP-84

TP-83

TP-82

TP-81

TP-80

TP-79

TP-78

TP-77

TP-76

TP-75

TP-74

TP-73

TP-72

TP-71

TP-70

TP-69

TP-68

TP-67

TP-66

TP-65

TP-64

TP-63

TP-62

TP-61

TP-60

TP-59

TP-58

TP-57

TP-56

TP-55

TP-54

TP-53

TP-52

TP-51

TP-50

TP-49

TP-48

TP-47

TP-46

TP-45

TP-44

TP-43

TP-42

TP-41

TP-40

TP-39

TP-38

TP-37







TP-36

TP-35



TP-34

TP-33

TP-32

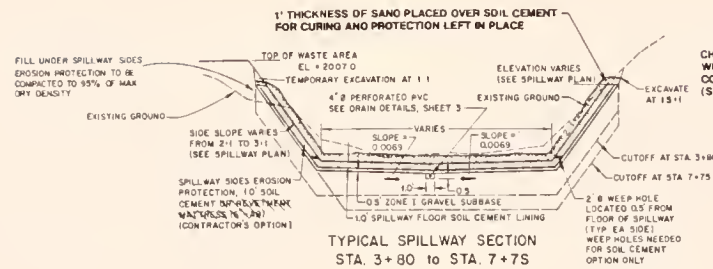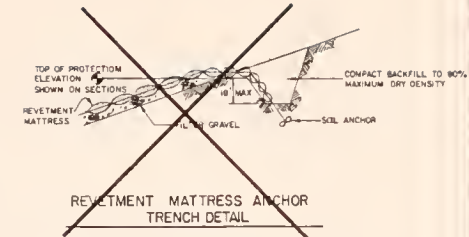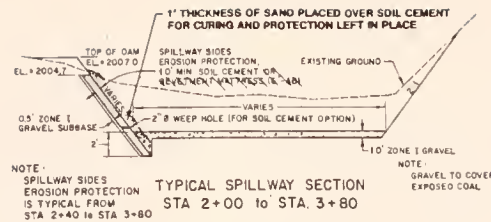

BURIED REINFORCEMENT MATRESS TO SPILLWAY FLOOR
DETAIL "A"

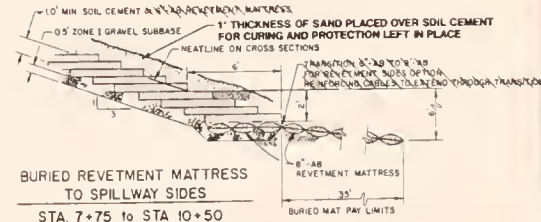

SPILLWAY CONNECTION DETAILS

TYPICAL SPILLWAY SECTIONS

NOT TO SCALE

NOTE: CONTRACTOR SELECTED SOIL CEMENT SPILLWAY SIDES EROSION PROTECTION









HKA ASSOCIATES
ENGINEERS-PLANNERS

Branch Offices:
• Bozeman, Montana
• Sheridan, Wyoming
• Billings, Montana 59107

Sheet No.
3A

of 12

Project No.	Sheet No.	Date	By	Check	Approved
GARTSIDE DAM REHABILITATION PROJECT	3A	JAN 1988	CHANG	CHANG	CHANG
SPILLWAY CROSS SECTIONS					

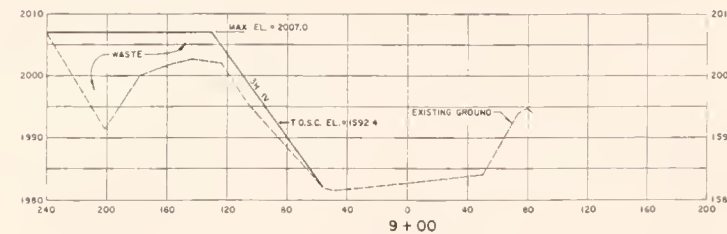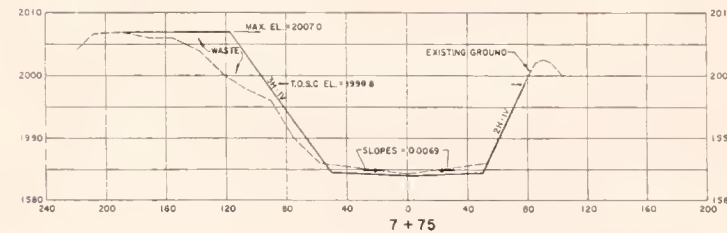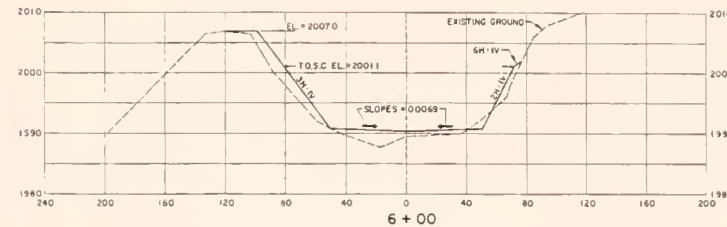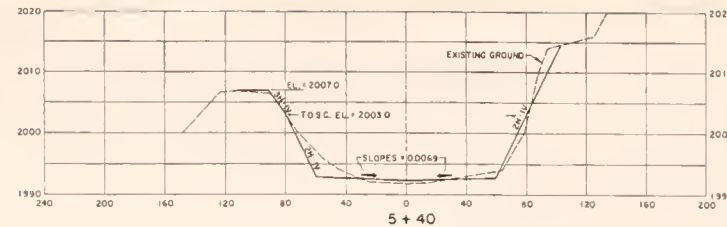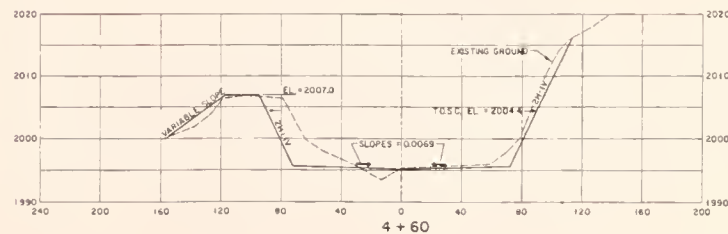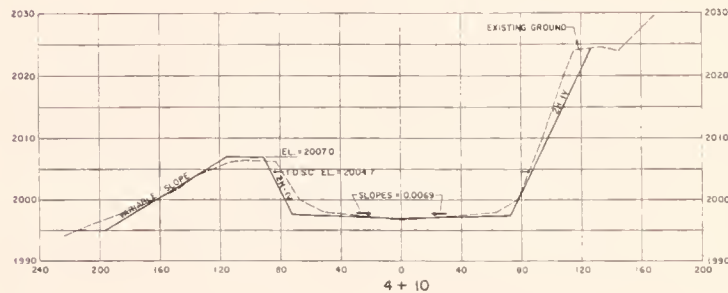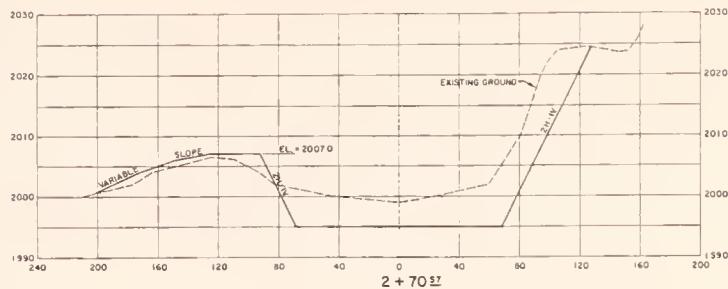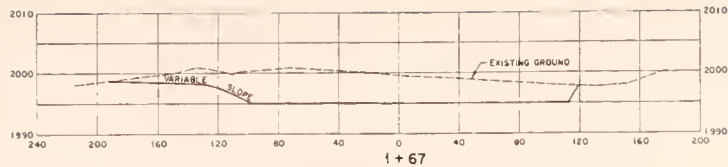

SPILLWAY CROSS SECTIONS

REFER TO SHEET 3 FOR LOCATIONS ON SPILLWAY PLAN

NOTES

- CROSS SECTIONS SHOW FINISHED ELEVATIONS ONLY. SEE TYPICAL SECTIONS ON SHEET 3 FOR NECESSARY OVER-EXCAVATION FOR SOIL CEMENT AND SUBBASE MATERIAL.
- TOP OF SOIL CEMENT (TOSC) ELEVATIONS ARE LOCATED BY SMALL ARROWS (→). SHALL BE THE SAME FOR PAVEMENT MATRESS OPTION.
- CROSS SECTIONS HAVE BEEN DRAWN LOOKING DOWNSTREAM.

Project No.	Sheet No.	Date	By	Revision

GARTSIDE DAM
REHABILITATION PROJECT
SPILLWAY CROSS SECTIONS











H&M ASSOCIATES
ENGINEERS-PLANNERS

Branch Offices:
Airport Industrial Park
P.O. Box 31318
Billings, Montana 59107 • Sheridan, Wyoming

Sheet No.

4

of 12

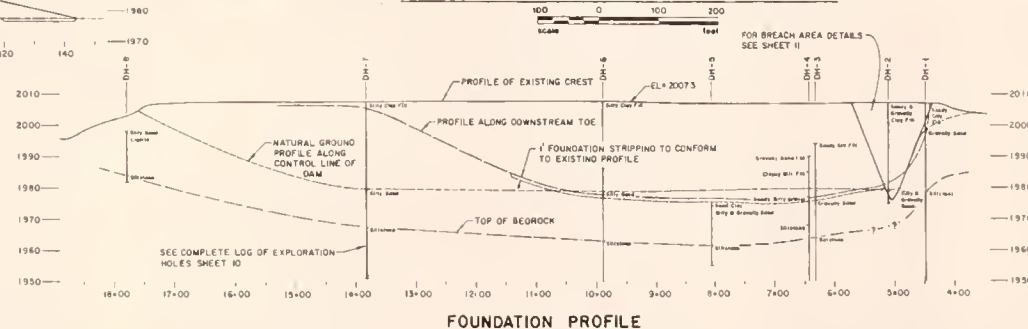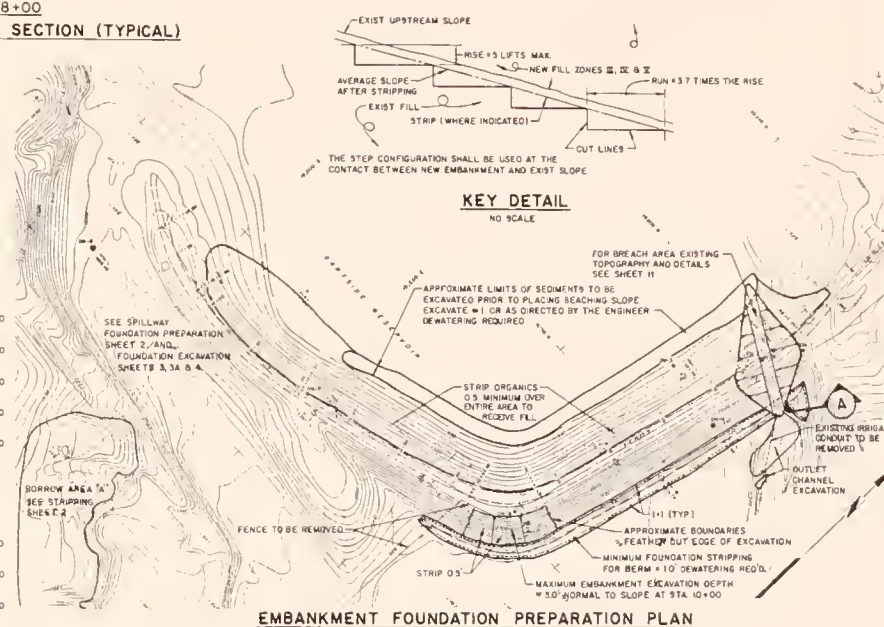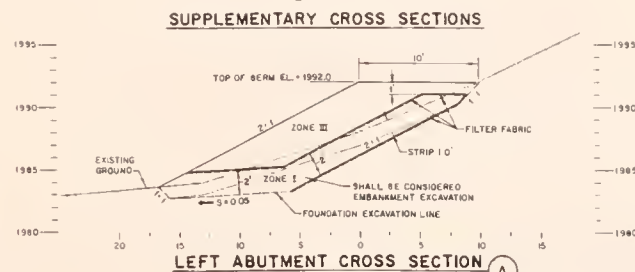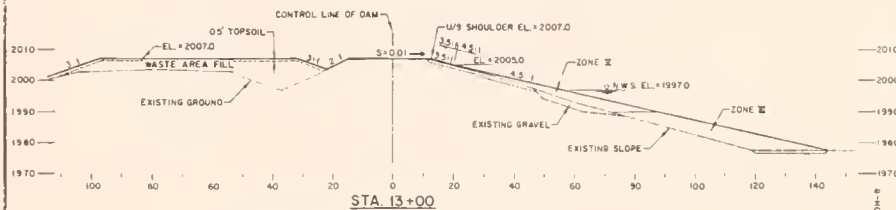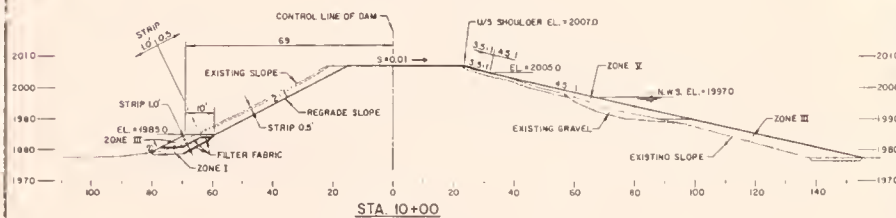

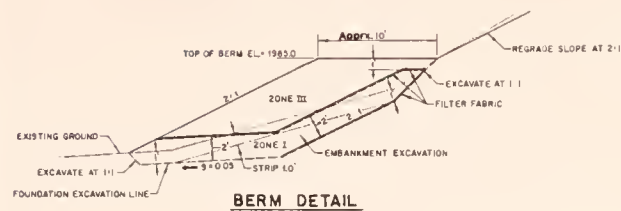
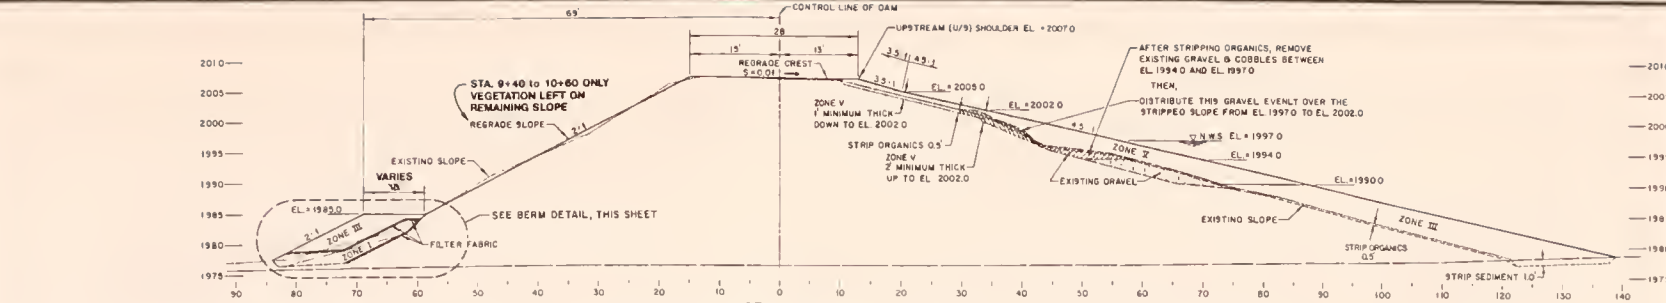


Project No.	Issue Ref.	I.D. No.	Date	Rev. 10-01	Designed	Drawn	Checked	Approved
GARTSIDE DAM REHABILITATION PROJECT EMBANKMENT CROSS SECTIONS								
Revision		By		Date				
1		JAC		JUL 1998				



HYKAM ASSOCIATES
ENGINEERS-PLANNERS

Airport Industrial Park
PO Box 31318
Billings, Montana 59107 • Sheridan, Wyoming

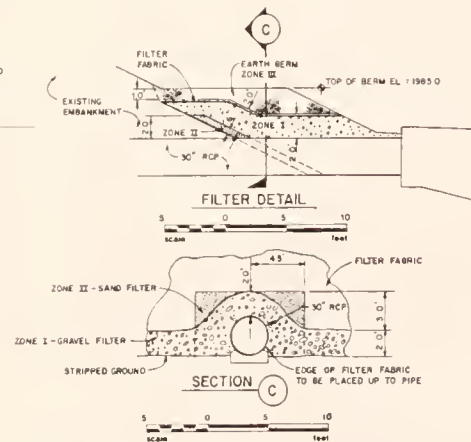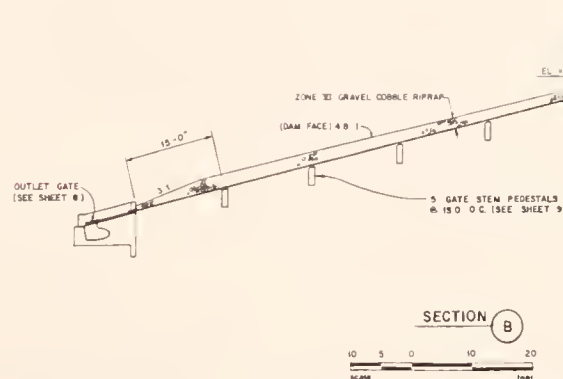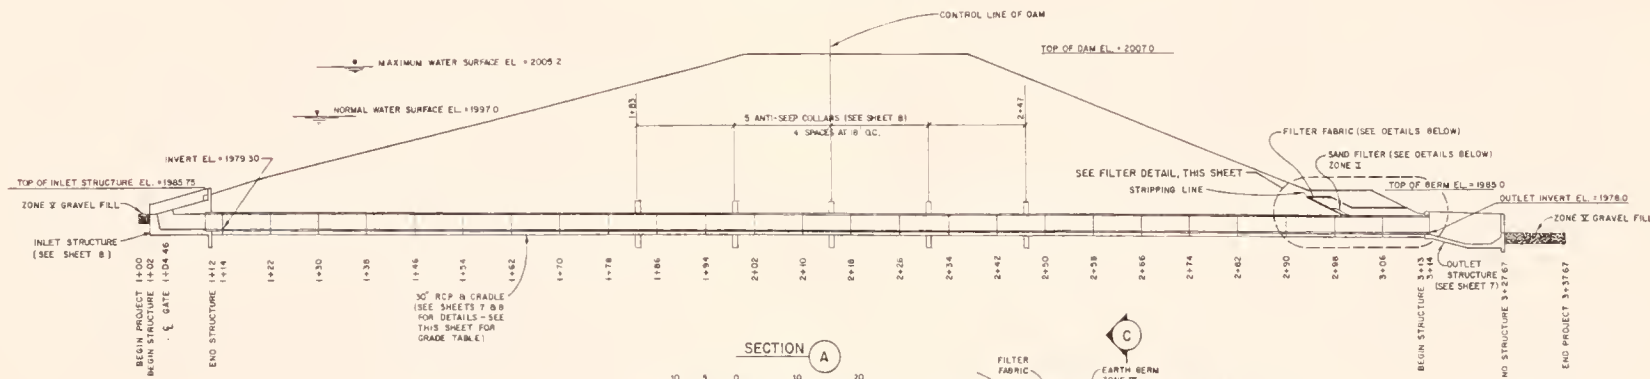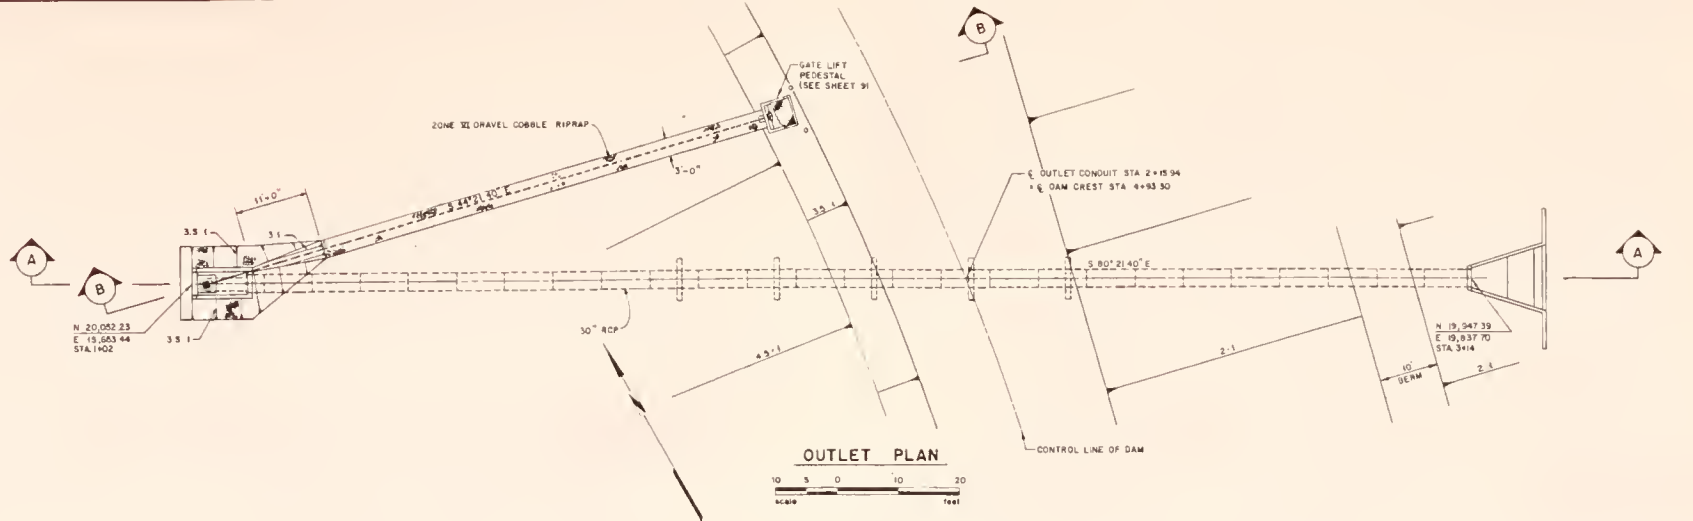

STATION	INVERT ELEVATION
1+14	1979.30
1+22	1979.29
1+30	1979.28
1+38	1979.27
1+46	1979.26
1+54	1979.25
1+62	1979.24
1+70	1979.23
1+78	1979.22
1+86	1979.19
1+94	1979.18
2+02	1979.12
2+10	1979.07
2+18	1979.02
2+26	1978.97
2+34	1978.91
2+42	1978.84
2+50	1978.77
2+58	1978.69
2+66	1978.61
2+74	1978.52
2+82	1978.43
2+90	1978.33
2+98	1978.23
3+06	1978.12
3+14	1978.00

Project No. 1001118 ID No. 1001118 Date: 8/21/14 Designer: 1001118

Drawn/Checked/Rev. Approved/2014

No.	Revision	By	Date
1	1	1001118	8/21/14











OUTLET CONDUIT PLAN AND PROFILE



HKM ASSOCIATES
ENGINEERS-PLANNERS

Branch Offices:
Airport Industrial Park
Lobby, Montana
P.O. Box 31318
Billings, Montana 59107 • Sheridan, Wyoming

Sheet No. 6 of 12

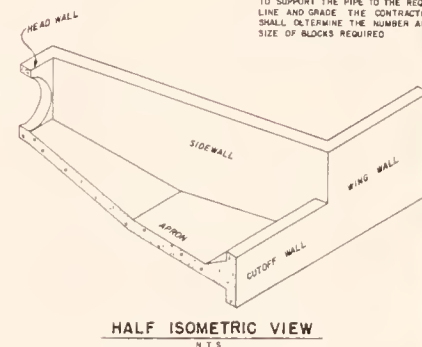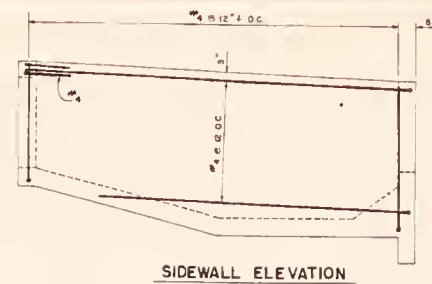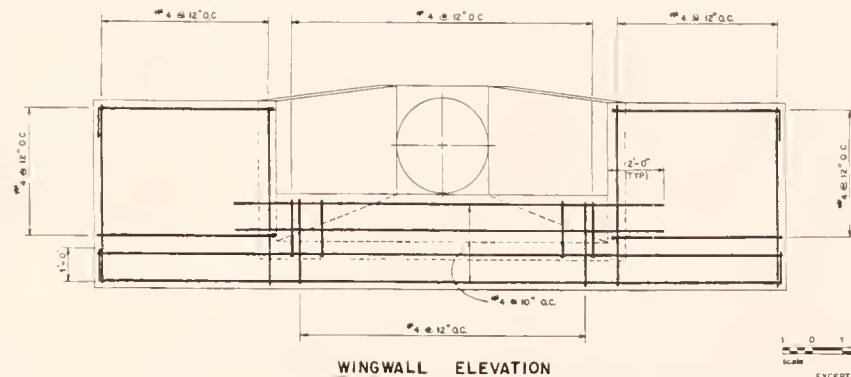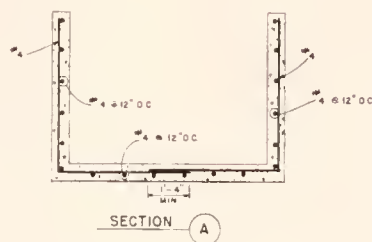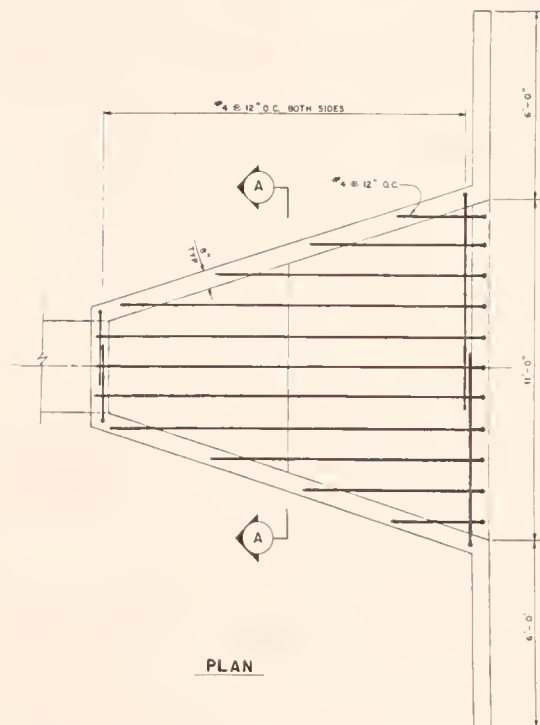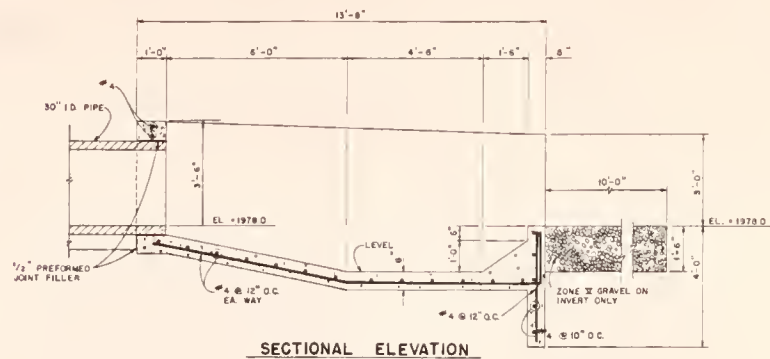

TEMP SUPPORT BLOCK

SUFFICIENT BLOCKS SHALL BE PROVIDED TO SUPPORT THE PIPE TO THE REQUIRED LINE AND GRADE. THE CONTRACTOR SHALL DETERMINE THE NUMBER AND SIZE OF BLOCKS REQUIRED.


PROJECT No. 1000000000	ID No.	Date	Sept. 1984	Orig. Dated	Drawn By ☐ Checked By ☐ Approved by ☐	
GARTSIDE DAM REHABILITATION PROJECT						
OUTLET STRUCTURE DETAILS						
No. ☐		Revision ☐		No. ☐		Date ☐

HK&M ASSOCIATES
ENGINEERS-PLANNERS


Airport Industrial Park
P O Box 31318
Billings, Montana 59107

Branch, Offices
• Libby, Montana
• Sheridan, Wyo.


Sheet No
7
of **12**

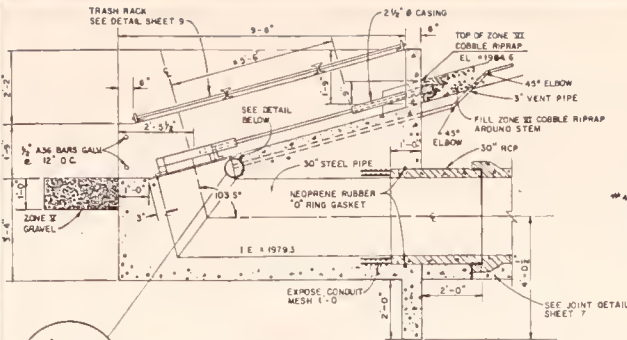


SECTIONAL ELEVATION

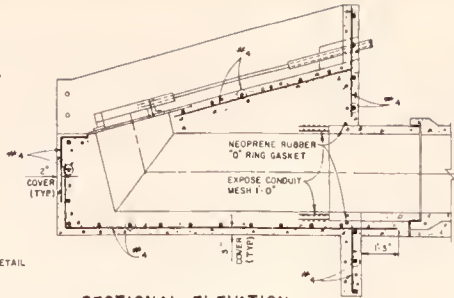



SECTIONAL ELEVATION

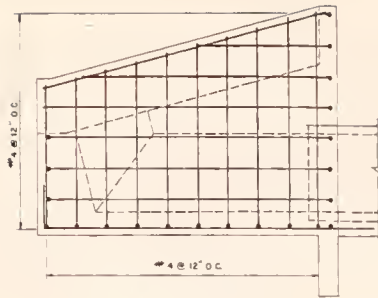


SECTIONAL ELEVATION




PIPE CRADLE

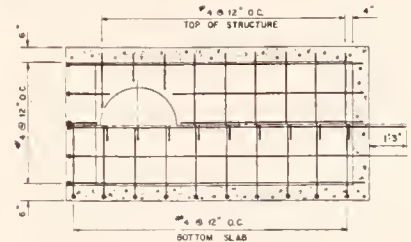


PLAN




UPSTREAM ELEVATION




DOWNSTREAM ELEVATION




ISOMETRIC VIEW

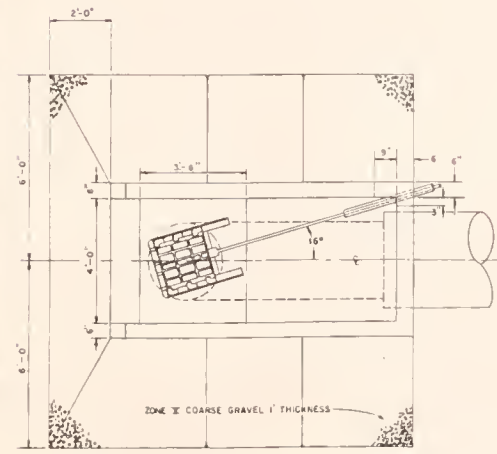


PLAN

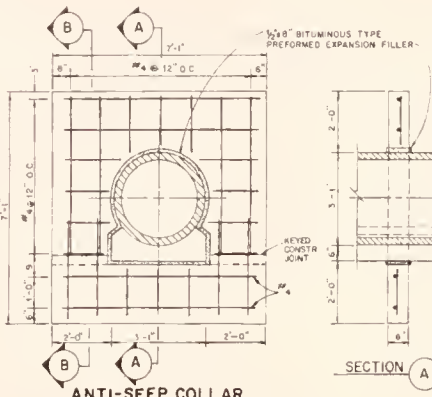


ANTI-SEEP COLLAR




SECTION A



SECTION B

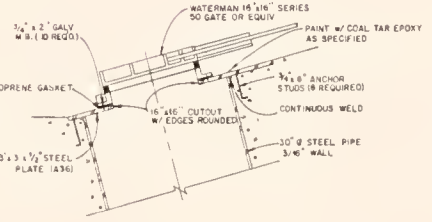

GATE DETAIL




HKA ASSOCIATES
ENGINEERS-PLANNERS




Branch Offices:
Airport Industrial Park
P.O. Box 31318
Billings, Montana 59107

Sheet No
8
of 12


Project No	10000	10 No	Date	10/1/1994	Designed	By	Date
Revised							
Revision							
No							
GARTSIDE DAM REHABILITATION PROJECT							
INLET STRUCTURE DETAILS							




TRASH RACK

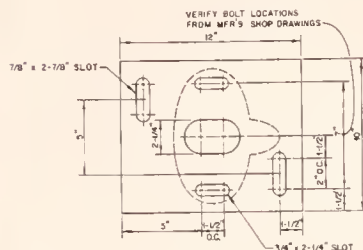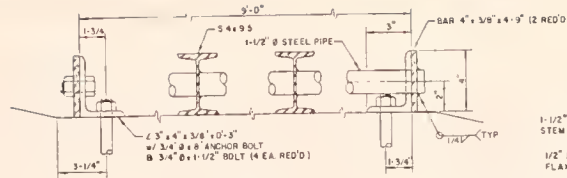

BASE PLATE

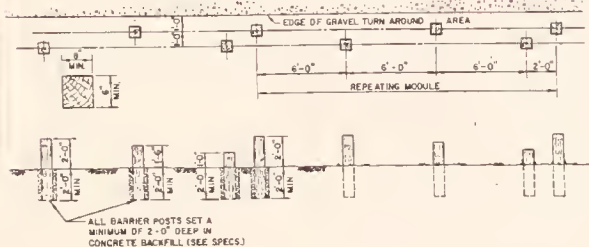


BARRIER POST DETAIL

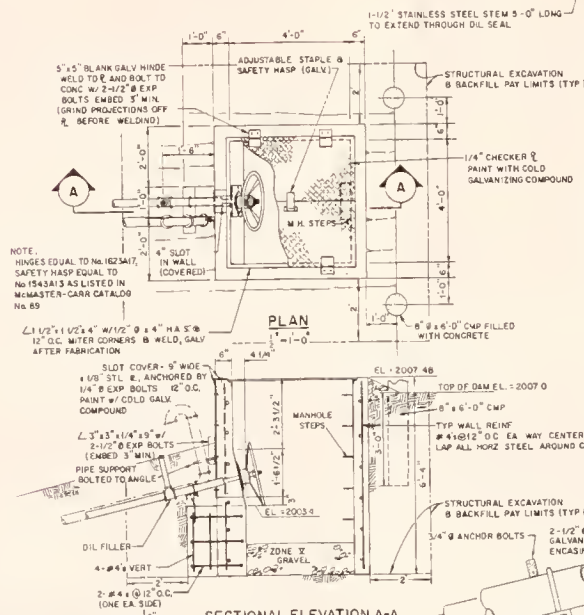

GATE LIFT PEDESTAL


TURNAROUND SIGN POST DETAIL

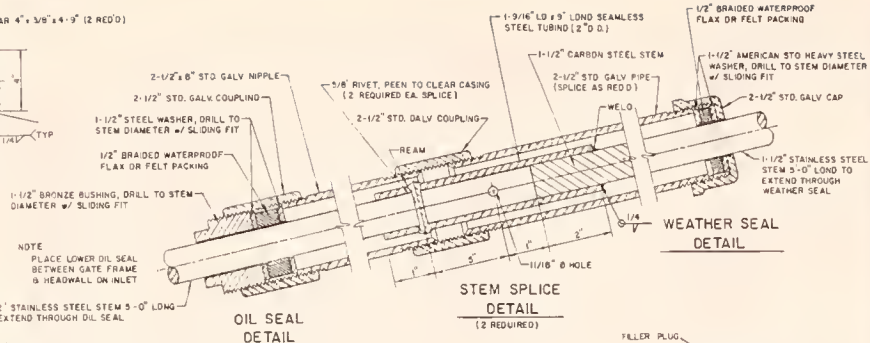


GATE STEM DETAILS

OIL SEAL DETAIL


STEM SPLICE DETAIL



ELEVATION



GATE STEM GUIDE



SECTIONAL ELEVATION




ELEVATION



SECTIONAL PLAN

GATE STEM PEDESTAL



By	Date	Design	Check	Approved
Revision				
No				



HKA ASSOCIATES
ENGINEERS-PLANNERS








Branch Offices:
Airport Industrial Park
Libby, Montana
P.O. Box 31318
Billings, Montana 59107 • Sheridan, Wyoming

Sheet No

9

of 12

TEST PIT LOGS

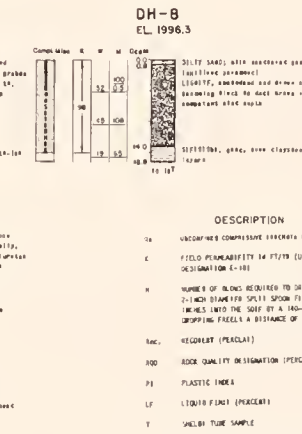

LEGEND

LEGEND

DRILL HOLE COMPLETION

PEA GRAVEL BENTONITE SLUG DRILL CUTTINGS SOLID

BACKFILL MATERIAL PVC

GEOLOGIC SYMBOLS

FIG. 1

FILL SANDY CLAY BAKED SHALE SILTY CLAY GRAVELLY SAND SILTY SAND

CLAYEY SANDY SANDY SILTSTONE LIGNITE LIGNITE

SCALE - 1" = 10' DRILL HOLES
1" = 4' TEST PITS


No. I.D. No. Date NOV-1984
GARTSIDE DAM
 REHABILITATION PROJECT
LOGS OF EXPLORATION HOLES

THE ASSOCIATES
ENGINEERS-PLANNERS
Airport Industrial Park
P.O. Box 31318
Branch Office
• Libby, Montana

Sheet No
10
of 12


TEST PIT No. 1 (TP-1)

LOCATION: 19883.1 N, 19816.8 E
ELEVATION: 1983.9




TEST PIT No. 4 (TP-4)

LOCATION: 19208.9 N, 19351.8 E
ELEVATION: 1982.7



TEST PIT No. 2 (TP-2)


LOCATION: 20031.5 N, 19817.2 E
ELEVATION: 1978.9







NOTE: Backwater from beaver dam standing adjacent to test pit site. Most observations based on returns entering in bucket and operator's feel (observations of hole condition under water was able to measure depth of which clay was encountered (8.0').

TEST PIT No. 3 (TP-3)

LOCATION: 19197.9 N, 19508.7 E
ELEVATION: 1979.7




NOTE: 1. EXPLORATION OF TEST PITS No. 1, No. 2, No. 3, & No. 4 (TP-1, TP-2, TP-3, TP-4) WAS PERFORMED ON JULY 6, 1989.
2. LOCATIONS OF TEST PITS No. 3 & No. 4 (TP-3, TP-4) ARE SHOWN ON SHEET 2

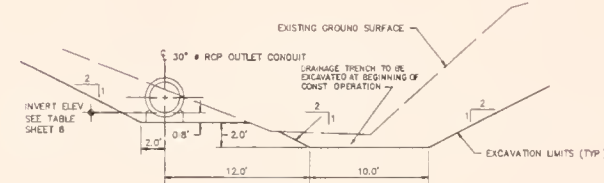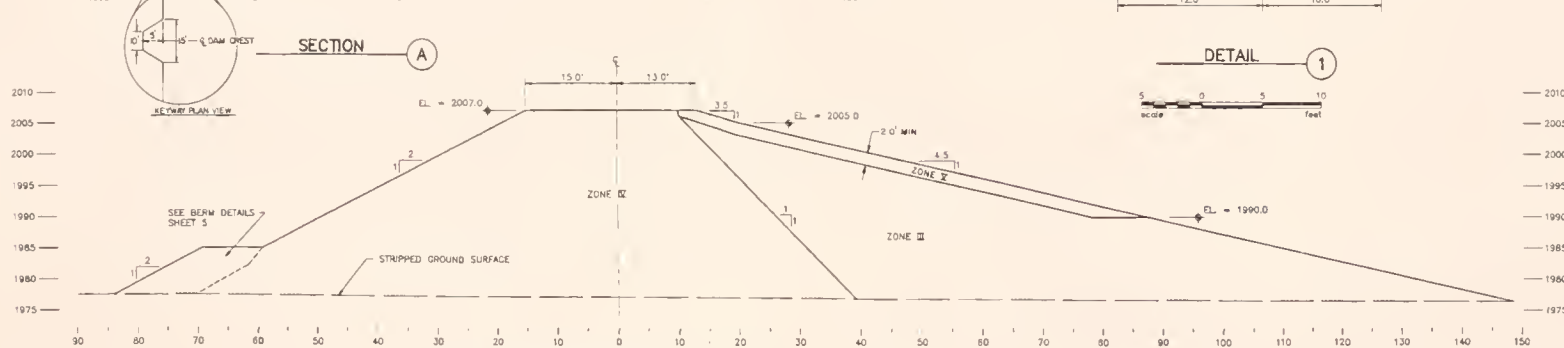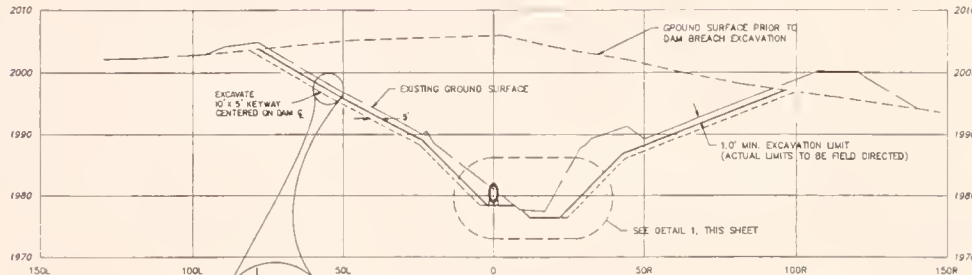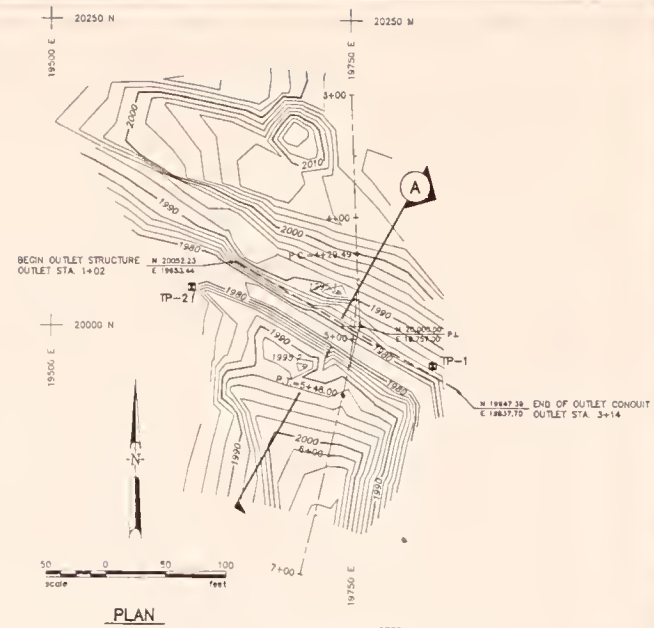


Project No.	Sheet No.	Date	Rev.	Test	Discarded	J. O'Brien	Checked	Approved
GARTSIDE DAM REHABILITATION PROJECT								
BREACH DETAILS								

HKA ASSOCIATES
ENGINEERS-PLANNERS
Branch Offices:
Bozeman, Montana
Billings, Montana
Sheridan, Wyoming

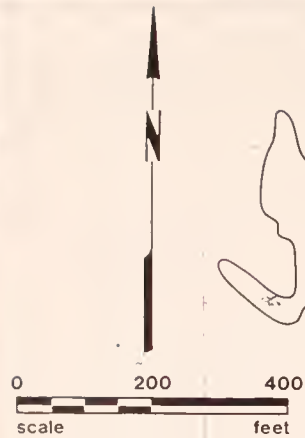


LAT.	LENGTH		CMP
	4"	6"	
A	315	40	10
B		350	10
C	575	50	10
D	317		
E		380	
F	684		
G	335		
H		520	
I	474		
	2700	1340	TOTAL LINEAL FEET

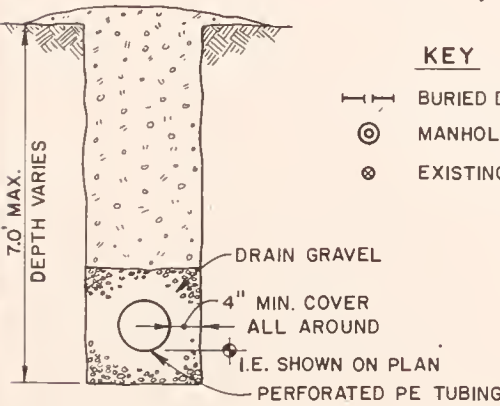

TYPICAL TRENCH SECTION

- KEY**
- BURIED DRAIN
 - MANHOLE
 - EXISTING MONITORING WELL

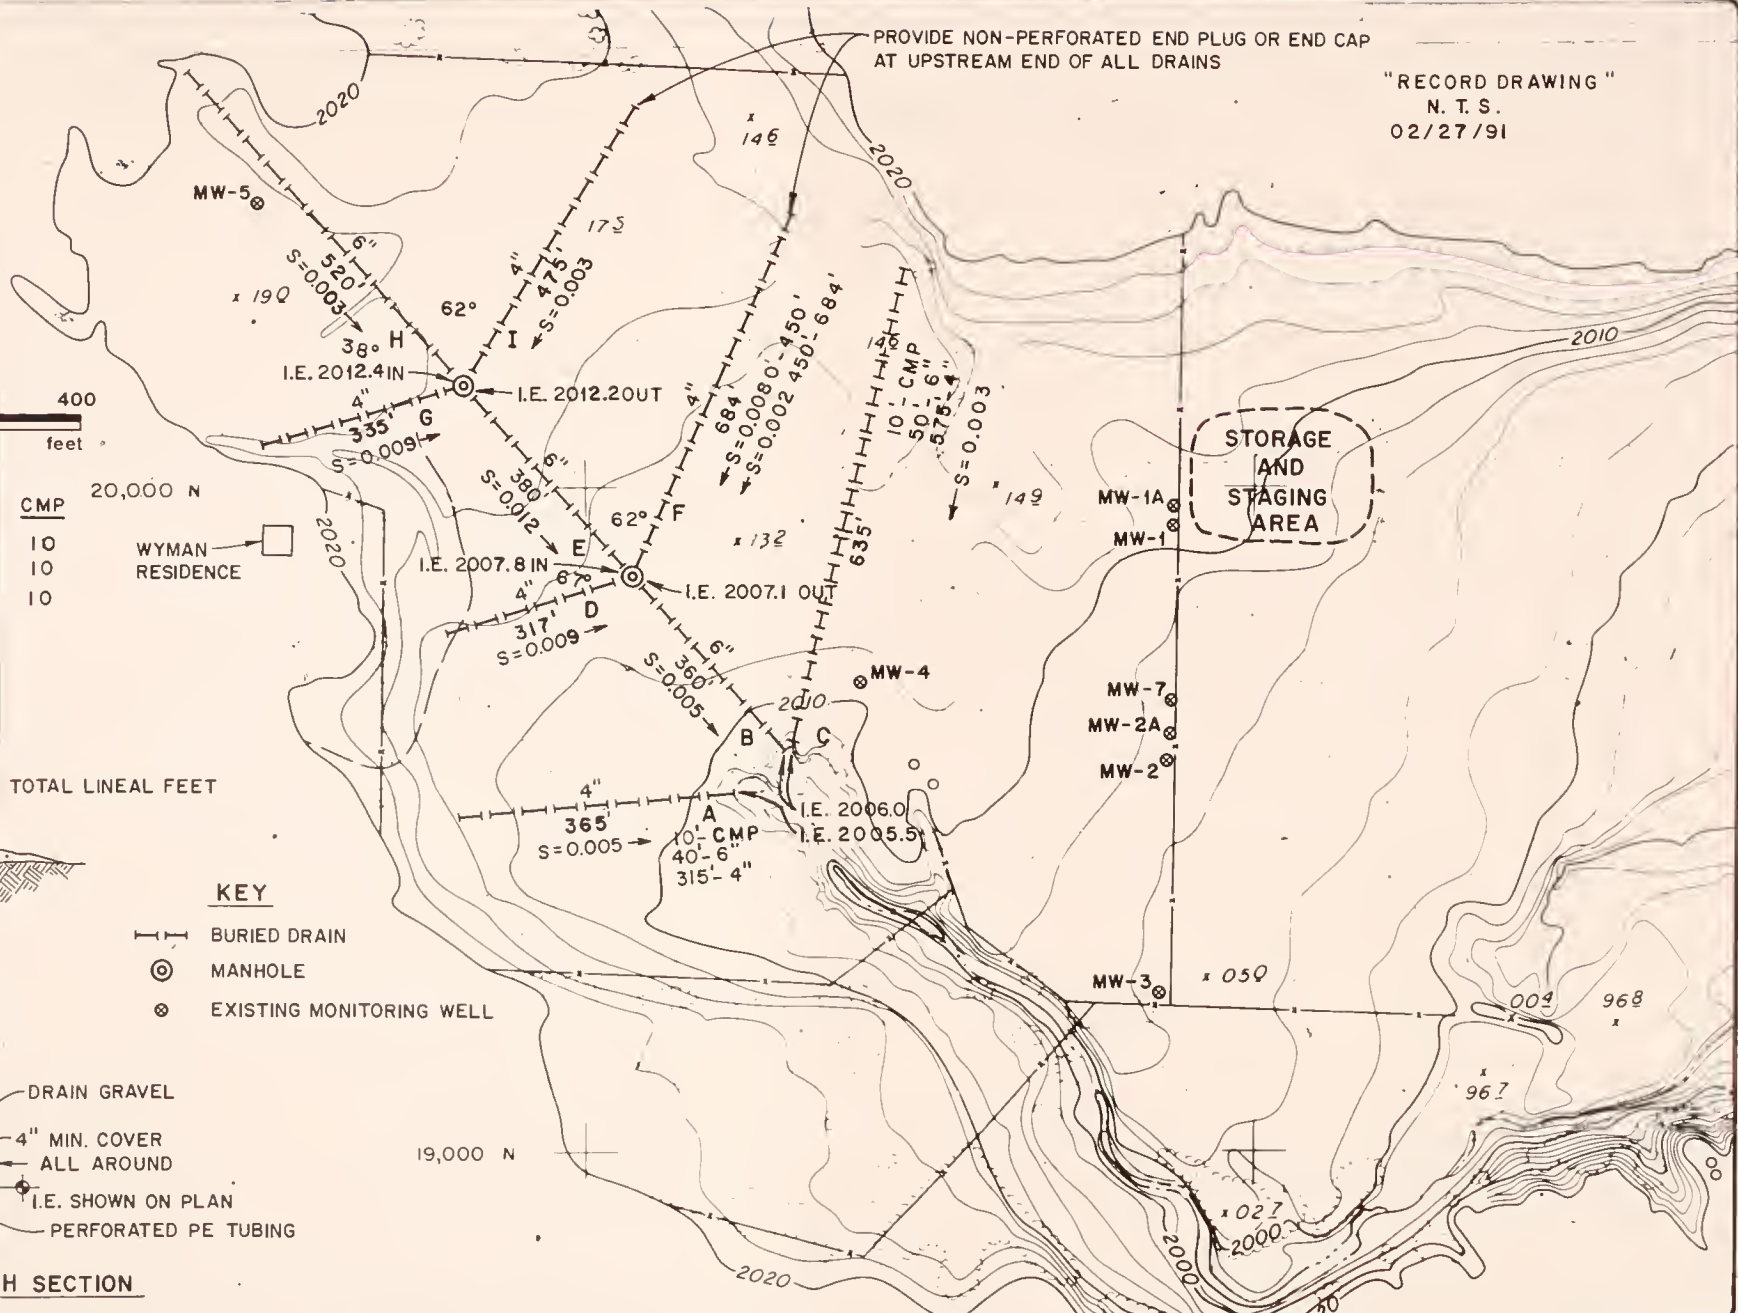

"RECORD DRAWING"
N. T. S.
02/27/91

GARTSIDE DAM - WYMAN DRAINS
PLAN and TRENCH DETAIL

H&M ASSOCIATES
ENGINEERS - PLANNERS
84087.136 AUG. 1989

